
XWMK VA

Screw-in fitting, angle 90°

Properties

Connection 1	metric conical outer thread
Sealing form 1	thread seal
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Screw-in fitting
Construction	Angle 90°
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Stainless steel



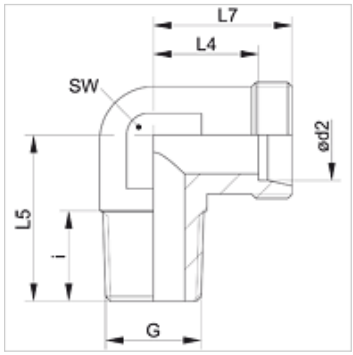

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)
XWM 04 LL 6 VA	LL	PN 100	4	M 6 x 1 K	8,0	11,0	17	15	9
XWM 04 LL VA	LL	PN 100	4	M 8 x 1 K	8,0	11,0	17	15	9
XWM 04 LL 10 VA	LL	PN 100	4	M 10 x 1 K	8,0	11,0	17	15	9
XWM 06 LL 6 VA	LL	PN 100	6	M 6 x 1 K	7,0	9,5	17	15	9
XWM 06 LL 8 VA	LL	PN 100	6	M 8 x 1 K	8,0	9,5	17	15	9
XWM 06 LL VA	LL	PN 100	6	M 10 x 1 K	9,0	9,5	17	15	9
XWM 08 LL 6 VA	LL	PN 100	8	M 6 x 1 K	8,0	11,5	20	17	12
XWM 08 LL 8 VA	LL	PN 100	8	M 8 x 1 K	8,0	11,5	20	17	12
XWM 08 LL VA	LL	PN 100	8	M 10 x 1 K	10,0	11,5	20	17	12
XWM NW 04 HL VA	L	PN 315	6	M 10 x 1 K	8,0	12,0	20	19	12
XWM NW 06 HL VA	L	PN 315	8	M 12 x 1.5 K	12,0	14,0	26	21	12
XWM NW 08 HL 12 VA	L	PN 315	10	M 12 x 1.5 K	12,0	15,0	27	22	14
XWM NW 08 HL VA	L	PN 315	10	M 14 x 1.5 K	11,5	15,0	27	22	14
XWM NW 10 HL VA	L	PN 315	12	M 16 x 1.5 K	11,5	17,0	28	24	17
XWM NW 13 HL VA	L	PN 315	15	M 18 x 1.5 K	13,5	21,0	32	28	19
XWM NW 16 HL VA	L	PN 315	18	M 22 x 1.5 K	15,0	23,5	36	31	24
XWM NW 03 HS VA	S	PN 400	6	M 12 x 1.5 K	12,0	16,0	26	23	12
XWM NW 04 HS VA	S	PN 400	8	M 14 x 1.5 K	12,0	17,0	27	24	14
XWM NW 06 HS VA	S	PN 400	10	M 16 x 1.5 K	12,0	17,5	28	25	17
XWM NW 08 HS VA	S	PN 400	12	M 18 x 1.5 K	12,0	21,5	28	29	17
XWM NW 10 HS VA	S	PN 400	14	M 20 x 1.5 K	14,0	22,0	32	30	19
XWM NW 13 HS VA	S	PN 400	16	M 22 x 1.5 K	14,0	24,5	32	33	24

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XWMK	Screw-in fitting, angle 90°, Steel
WMK VA	Screw-in fitting, angle 90°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.