


Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	Shape B
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Screw-in fitting
Construction	Angle 90°
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised

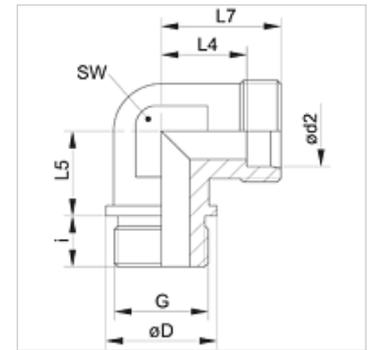

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G	Ø D (mm)	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)
XWR NW 20 HL	L	PN 160	22	G 3/4" -14	32	16	27,5	26	35	27
XWR NW 25 HL	L	PN 160	28	G 1" -11	39	18	30,5	30	38	36
XWR NW 32 HL	L	PN 160	35	G 1.1/4" -11	49	20	34,5	34	45	41
XWR NW 40 HL	L	PN 160	42	G 1.1/2" -11	55	22	40,0	39	51	50
XWR NW 16 HS	S	PN 160	20	G 3/4" -14	32	16	26,5	26	32	27
XWR NW 20 HS	S	PN 160	25	G 1" -11	39	18	30,0	30	42	36
XWR NW 25 HS	S	PN 160	30	G 1.1/4" -11	49	20	35,5	34	49	41
XWR NW 32 HS	S	PN 160	38	G 1.1/2" -11	55	22	41,0	39	57	50

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XWR VA	Screw-in fitting, angle 90°, Stainless steel
WR	Screw-in fitting, angle 90°, Steel