
XWR VA

Screw-in fitting, angle 90°

Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	Shape B
Connection 2	metric cylindrical outer thread
Sealing form 2	24° inner cone
Design	Screw-in fitting
Construction	Angle 90°
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Stainless steel



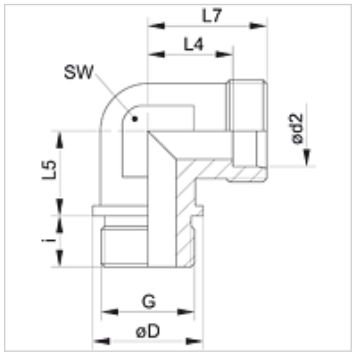

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G	Ø D (mm)	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)
XWR NW 20 HL VA	L	PN 160	22	G 3/4" -14	32	16	27,5	26	35	27
XWR NW 25 HL VA	L	PN 160	28	G 1" -11	39	18	30,5	30	38	36
XWR NW 32 HL VA	L	PN 160	35	G 1.1/4" -11	49	20	34,5	34	45	41
XWR NW 40 HL VA	L	PN 160	42	G 1.1/2" -11	55	22	40,0	39	51	50
XWR NW 16 HS VA	S	PN 160	20	G 3/4" -14	32	16	26,5	26	32	27
XWR NW 20 HS VA	S	PN 160	25	G 1" -11	39	18	30,0	30	42	36
XWR NW 25 HS VA	S	PN 160	30	G 1.1/4" -11	49	20	35,5	34	49	41
XWR NW 32 HS VA	S	PN 160	38	G 1.1/2" -11	55	22	41,0	39	57	50

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XWR	Screw-in fitting, angle 90°, Steel
WR VA	Screw-in fitting, angle 90°, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.