


# XWR VA

Screw-in fitting, angle 90°

**HANSA FLEX**

## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	Shape B
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	24° inner cone
<b>Design</b>	Screw-in fitting
<b>Construction</b>	Angle 90°
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket (without union nut and cutting ring)
<b>Material</b>	Stainless steel

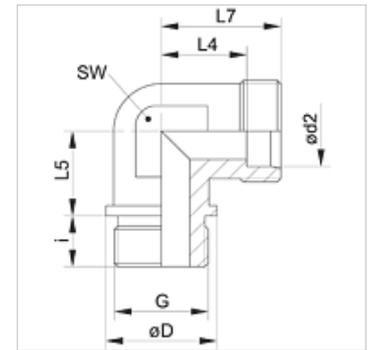

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	Ø d2 (mm)	G	Ø D (mm)	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)
XWR NW 20 HL VA	L	PN 160	22	G 3/4" -14	32	16	27,5	26	35	27
XWR NW 25 HL VA	L	PN 160	28	G 1" -11	39	18	30,5	30	38	36
XWR NW 32 HL VA	L	PN 160	35	G 1.1/4" -11	49	20	34,5	34	45	41
XWR NW 40 HL VA	L	PN 160	42	G 1.1/2" -11	55	22	40,0	39	51	50
XWR NW 16 HS VA	S	PN 160	20	G 3/4" -14	32	16	26,5	26	32	27
XWR NW 20 HS VA	S	PN 160	25	G 1" -11	39	18	30,0	30	42	36
XWR NW 25 HS VA	S	PN 160	30	G 1.1/4" -11	49	20	35,5	34	49	41
XWR NW 32 HS VA	S	PN 160	38	G 1.1/2" -11	55	22	41,0	39	57	50

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

<b>XWR</b>	Screw-in fitting, angle 90°, Steel
<b>WR VA</b>	Screw-in fitting, angle 90°, Stainless steel