


# XWR VA

Screw-in fitting, angle 90°

**HANSA FLEX**

## Properties

|                        |   |
|------------------------|---|
| <b>Connection 1</b>    | BSP external thread, cylindrical            |
| <b>Sealing form 1</b>  | Shape B                                     |
| <b>Connection 2</b>    | metric cylindrical outer thread             |
| <b>Sealing form 2</b>  | 24° inner cone                              |
| <b>Design</b>          | Screw-in fitting                            |
| <b>Construction</b>    | Angle 90°                                   |
| <b>Standard</b>        | DIN 2353<br>ISO 8434-1                      |
| <b>Scope of supply</b> | Socket (without union nut and cutting ring) |
| <b>Material</b>        | Stainless steel                             |

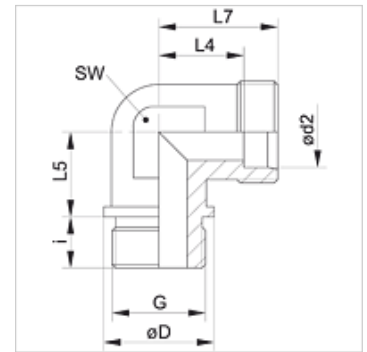

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification  | Series | Operating pressure | Ø d2 (mm) | G            | Ø D (mm) | i (mm) | L4 (mm) | L5 (mm) | L7 (mm) | AF (mm) |
|-----------------|--------|--------------------|-----------|--------------|----------|--------|---------|---------|---------|---------|
| XWR NW 20 HL VA | L      | PN 160             | 22        | G 3/4" -14   | 32       | 16     | 27,5    | 26      | 35      | 27      |
| XWR NW 25 HL VA | L      | PN 160             | 28        | G 1" -11     | 39       | 18     | 30,5    | 30      | 38      | 36      |
| XWR NW 32 HL VA | L      | PN 160             | 35        | G 1.1/4" -11 | 49       | 20     | 34,5    | 34      | 45      | 41      |
| XWR NW 40 HL VA | L      | PN 160             | 42        | G 1.1/2" -11 | 55       | 22     | 40,0    | 39      | 51      | 50      |
| XWR NW 16 HS VA | S      | PN 160             | 20        | G 3/4" -14   | 32       | 16     | 26,5    | 26      | 32      | 27      |
| XWR NW 20 HS VA | S      | PN 160             | 25        | G 1" -11     | 39       | 18     | 30,0    | 30      | 42      | 36      |
| XWR NW 25 HS VA | S      | PN 160             | 30        | G 1.1/4" -11 | 49       | 20     | 35,5    | 34      | 49      | 41      |
| XWR NW 32 HS VA | S      | PN 160             | 38        | G 1.1/2" -11 | 55       | 22     | 41,0    | 39      | 57      | 50      |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

|              |  |
|--------------|--|
| <b>XWR</b>   | Screw-in fitting, angle 90°, Steel           |
| <b>WR VA</b> | Screw-in fitting, angle 90°, Stainless steel |