


# G AB IR

Screw-on connector

**HANSA FLEX**

## Properties

<b>Connection 1</b>	BSP nut thread
<b>Sealing form 1</b>	60° outer cone
<b>Connection 2</b>	BSP cylindrical internal threads
<b>Sealing form 2</b>	Flat seal
<b>Design</b>	Screw-on connector
<b>Construction</b>	straight
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

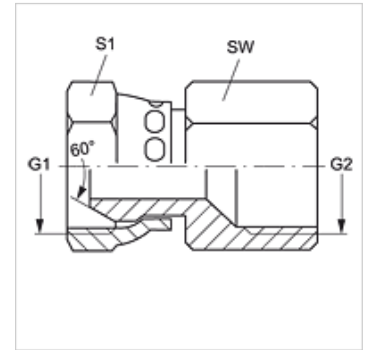

## Item

Identification	G1 + G2	AF (mm)	S1
<b>G AB 02 IR</b>	G 1/8" -28	14	14
<b>G AB 04 IR</b>	G 1/4" -19	17	19
<b>G AB 06 IR</b>	G 3/8" -19	22	22
<b>G AB 08 IR</b>	G 1/2" -14	27	27
<b>G AB 12 IR</b>	G 3/4" -14	32	32
<b>G AB 16 IR</b>	G 1" -11	43	41
<b>G AB 20 IR</b>	G 1.1/4" -11	50	50
<b>G AB 24 IR</b>	G 1.1/2" -11	60	60

SW, S1, S2 = With across flats