


G AB IR

Screw-on connector

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | BSP nut thread |
| Sealing form 1 | 60° outer cone |
| Connection 2 | BSP cylindrical internal threads |
| Sealing form 2 | Flat seal |
| Design | Screw-on connector |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

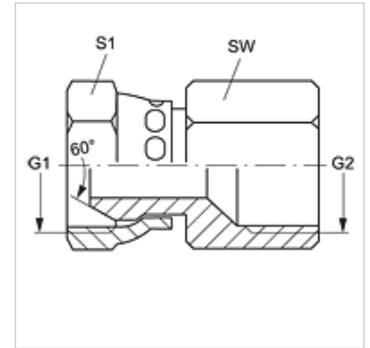

Item

| Identification | G1 + G2 | AF (mm) | S1 |
|-------------------|--------------|------------|----|
| G AB 02 IR | G 1/8" -28 | 14 | 14 |
| G AB 04 IR | G 1/4" -19 | 17 | 19 |
| G AB 06 IR | G 3/8" -19 | 22 | 22 |
| G AB 08 IR | G 1/2" -14 | 27 | 27 |
| G AB 12 IR | G 3/4" -14 | 32 | 32 |
| G AB 16 IR | G 1" -11 | 43 | 41 |
| G AB 20 IR | G 1.1/4" -11 | 50 | 50 |
| G AB 24 IR | G 1.1/2" -11 | 60 | 60 |

SW, S1, S2 = With across flats