
G AJ HJOF
Connectors

HANSA-FLEX

Properties

Connection 1	UN/UNF nut threads
Sealing form 1	74° inner cone
Connection 2	ORFS external threads
Sealing form 2	flat seal with O-ring
Design	Connectors
Construction	straight
Material	Steel
Surface	electro galvanised



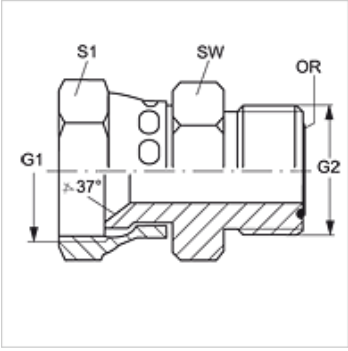

Item

Identification	G1	G2	AF (mm)	S1	OR
G AJ 04 HJOF	7/16"-20 UNF	9/16"-18 UNF	16	14	7.65 x 1.78
G AJ 06 HJOF	9/16"-18 UNF	11/16" -16 UN	19	18	9.25 x 1.78
G AJ 08 HJOF	3/4"-16 UNF	13/16" -16 UN	22	22	12.42 x 1.78
G AJ 10 HJOF	7/8" -14 UNF	1" -14 UNS	27	25	15.60 x 1.78
G AJ 12 HJOF	1.1/16" -12 UN	1.3/16" -12 UN	32	32	18.77 x 1.78
G AJ 16 HJOF	1.5/16" -12 UN	1.7/16" -12 UN	38	38	23.52 x 1.78

SW, S1, S2 = With across flats

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.