
G AN IN
Screw-on socket

HANSA-FLEX

Properties

Connection 1	NPT nut thread (NPSM)
Sealing form 1	60° outer cone
Connection 2	NPT internal thread
Sealing form 2	thread seal
Design	Screw-on socket
Construction	straight
Material	Steel
Surface	electro galvanised



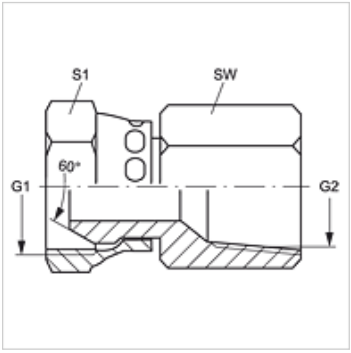

Item

Identification	G1	G2	AF (mm)	S1
G AN 02 IN	1/8" -27 NPT	1/8" -27 NPT	14	14
G AN 04 IN	1/4" -18 NPT	1/4" -18 NPT	18	18
G AN 06 IN	3/8" -18 NPT	3/8" -18 NPT	22	22
G AN 06 IN 04	3/8" -18 NPT	1/4" -18 NPT	22	22
G AN 08 IN 06	1/2" -14 NPT	3/8" -18 NPT	25	22
G AN 08 IN	1/2" -14 NPT	1/2" -14 NPT	25	25
G AN 08 IN 12	1/2" -14 NPT	3/4" -14 NPT	32	25
G AN 12 IN	3/4" -14 NPT	3/4" -14 NPT	32	32
G AN 16 IN	1" -11.5 NPT	1" -11.5 NPT	38	38
G AN 20 IN	1.1/4" -11.5 NPT	1.1/4" -11.5 NPT	48	48
G AN 24 IN	1.1/2" -11.5 NPT	1.1/2" -11.5 NPT	54	54
G AN 32 IN	2" -11.5 NPT	2" -11.5 NPT	67	67

SW, S1, S2 = With across flats

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.