

G AN IN

Screw-on socket

Properties

Connection 1 NPT nut thread (NPSM)

Sealing form 1 60° outer cone

Connection 2 NPT internal thread


Sealing form 2 thread seal

Design Screw-on socket

Construction straight

Material Steel

Surface electro galvanised

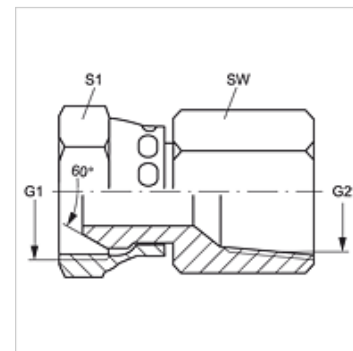

Item

| Identification | G1 | G2 | AF (mm) | S1 |
|----------------------|------------------|------------------|------------|----|
| G AN 02 IN | 1/8" -27 NPT | 1/8" -27 NPT | 14 | 14 |
| G AN 04 IN | 1/4" -18 NPT | 1/4" -18 NPT | 18 | 18 |
| G AN 06 IN | 3/8" -18 NPT | 3/8" -18 NPT | 22 | 22 |
| G AN 06 IN 04 | 3/8" -18 NPT | 1/4" -18 NPT | 22 | 22 |
| G AN 08 IN 06 | 1/2" -14 NPT | 3/8" -18 NPT | 25 | 22 |
| G AN 08 IN | 1/2" -14 NPT | 1/2" -14 NPT | 25 | 25 |
| G AN 08 IN 12 | 1/2" -14 NPT | 3/4" -14 NPT | 32 | 25 |
| G AN 12 IN | 3/4" -14 NPT | 3/4" -14 NPT | 32 | 32 |
| G AN 16 IN | 1" -11.5 NPT | 1" -11.5 NPT | 38 | 38 |
| G AN 20 IN | 1.1/4" -11.5 NPT | 1.1/4" -11.5 NPT | 48 | 48 |
| G AN 24 IN | 1.1/2" -11.5 NPT | 1.1/2" -11.5 NPT | 54 | 54 |
| G AN 32 IN | 2" -11.5 NPT | 2" -11.5 NPT | 67 | 67 |

SW, S1, S2 = With across flats