


Properties

| | |
|-----------------------|---------------------------------|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | 60° inner cone |
| Connection 2 | metric cylindrical outer thread |
| Sealing form 2 | 60° inner cone |
| Design | Connectors |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

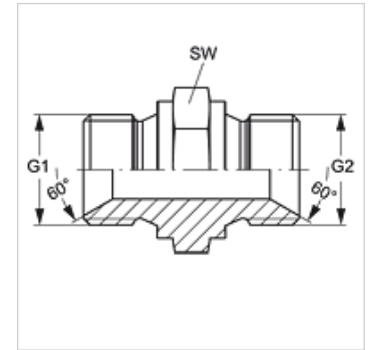

Item

| Identification | G1 | G2 | AF (mm) |
|------------------|------------|------------|------------|
| G 04 H 02 | M 12 x 1.5 | M 10 x 1 | 17 |
| G H 04 | M 12 x 1.5 | M 12 x 1.5 | 17 |
| G 06 H 04 | M 14 x 1.5 | M 12 x 1.5 | 19 |
| G H 06 | M 14 x 1.5 | M 14 x 1.5 | 19 |
| G 08 H 04 | M 16 x 1.5 | M 12 x 1.5 | 22 |
| G 08 H 06 | M 16 x 1.5 | M 14 x 1.5 | 22 |
| G H 08 | M 16 x 1.5 | M 16 x 1.5 | 22 |
| G H 10 | M 18 x 1.5 | M 18 x 1.5 | 24 |
| G 13 H 10 | M 22 x 1.5 | M 18 x 1.5 | 27 |
| G H 13 | M 22 x 1.5 | M 22 x 1.5 | 27 |
| G H 16 | M 26 x 1.5 | M 26 x 1.5 | 32 |
| G H 20 | M 30 x 1.5 | M 30 x 1.5 | 36 |
| G H 25 | M 38 x 1.5 | M 38 x 1.5 | 46 |
| G 25 H 20 | M 38 x 1.5 | M 30 x 1.5 | 46 |
| G 32 H 25 | M 45 x 1.5 | M 38 x 1.5 | 55 |
| G H 32 | M 45 x 1.5 | M 45 x 1.5 | 55 |
| G 40 H 32 | M 52 x 1.5 | M 45 x 1.5 | 55 |
| G H 40 | M 52 x 1.5 | M 52 x 1.5 | 55 |
| G 50 H 40 | M 65 x 2 | M 52 x 1.5 | 65 |
| G H 50 | M 65 x 2 | M 65 x 2 | 65 |
| G H 60 | M 78 x 2 | M 78 x 2 | 80 |

AF = Width across flats