


# G HB HJR

## Screw-in sockets

### Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	60° inner cone
<b>Connection 2</b>	BSP cylindrical external threads
<b>Sealing form 2</b>	60° outer cone
<b>Design</b>	Screw-in sockets
<b>Construction</b>	straight
<b>Standard connection 2</b>	JIS B 8363
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

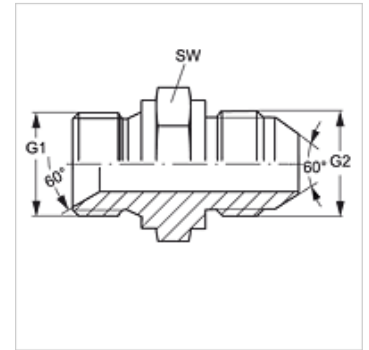

### Item

Identification	G1 + G2	AF (mm)
<b>G HB 04 HJR</b>	G 1/4" -19	19
<b>G HB 06 HJR</b>	G 3/8" -19	22
<b>G HB 08 HJR</b>	G 1/2" -14	27
<b>G HB 12 HJR</b>	G 3/4" -14	32
<b>G HB 16 HJR</b>	G 1" -11	41

AF = Width across flats