
# G HB IN
Screw-on socket

## Properties

| | |
|---|---|
| **Connection 1** | BSP external thread, cylindrical |
| **Sealing form 1** | 60° inner cone |
| **Connection 2** | NPT internal thread |
| **Sealing form 2** | thread seal |
| **Design** | Screw-on socket |
| **Construction** | straight |
| **Material** | Steel |
| **Surface** | electro galvanised |



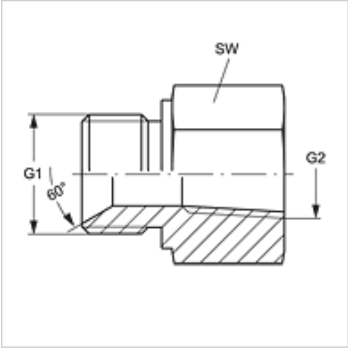


## Item

| Identification | G1 | G2 | AF (mm) |
|---|---|---|---|
| **G HB 02 IN** | G 1/8" -28 | 1/8" -27 NPT | 14 |
| **G HB 02 IN 04** | G 1/8" -28 | 1/4" -18 NPT | 19 |
| **G HB 04 IN** | G 1/4" -19 | 1/4" -18 NPT | 19 |
| **G HB 04 IN 06** | G 1/4" -19 | 3/8" -18 NPT | 24 |
| **G HB 06 IN 04** | G 3/8" -19 | 1/4" -18 NPT | 22 |
| **G HB 06 IN** | G 3/8" -19 | 3/8" -18 NPT | 24 |
| **G HB 08 IN** | G 1/2" -14 | 1/2" -14 NPT | 27 |
| **G HB 12 IN** | G 3/4" -14 | 3/4" -14 NPT | 36 |
| **G HB 16 IN** | G 1" -11 | 1" -11.5 NPT | 41 |
| **G HB 20 IN** | G 1.1/4" -11 | 1.1/4" -11.5 NPT | 50 |
| **G HB 24 IN** | G 1.1/2" -11 | 1.1/2" -11.5 NPT | 55 |

AF = Width across flats

## Product versions

| | |
|---|---|
| **G HB IN VA** | Screw-on socket, Stainless steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*