


G HB IN

Screw-on socket

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | 60° inner cone |
| Connection 2 | NPT internal thread |
| Sealing form 2 | thread seal |
| Design | Screw-on socket |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

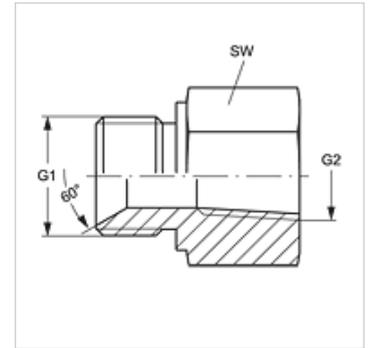

Item

| Identification | G1 | G2 | AF (mm) |
|----------------------|--------------|------------------|------------|
| G HB 02 IN | G 1/8" -28 | 1/8" -27 NPT | 14 |
| G HB 02 IN 04 | G 1/8" -28 | 1/4" -18 NPT | 19 |
| G HB 04 IN | G 1/4" -19 | 1/4" -18 NPT | 19 |
| G HB 04 IN 06 | G 1/4" -19 | 3/8" -18 NPT | 24 |
| G HB 06 IN 04 | G 3/8" -19 | 1/4" -18 NPT | 22 |
| G HB 06 IN | G 3/8" -19 | 3/8" -18 NPT | 24 |
| G HB 08 IN | G 1/2" -14 | 1/2" -14 NPT | 27 |
| G HB 12 IN | G 3/4" -14 | 3/4" -14 NPT | 36 |
| G HB 16 IN | G 1" -11 | 1" -11.5 NPT | 41 |
| G HB 20 IN | G 1.1/4" -11 | 1.1/4" -11.5 NPT | 50 |
| G HB 24 IN | G 1.1/2" -11 | 1.1/2" -11.5 NPT | 55 |

AF = Width across flats

Product versions

| | |
|-------------------|----------------------------------|
| G HB IN VA | Screw-on socket, Stainless steel |
|-------------------|----------------------------------|