


# G HB IN

## Screw-on socket

### Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	60° inner cone
<b>Connection 2</b>	NPT internal thread
<b>Sealing form 2</b>	thread seal
<b>Design</b>	Screw-on socket
<b>Construction</b>	straight
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

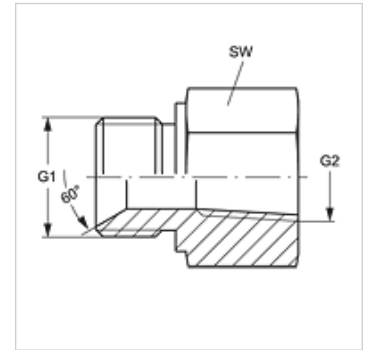

### Item

Identification	G1	G2	AF (mm)
<b>G HB 02 IN</b>	G 1/8" -28	1/8" -27 NPT	14
<b>G HB 02 IN 04</b>	G 1/8" -28	1/4" -18 NPT	19
<b>G HB 04 IN</b>	G 1/4" -19	1/4" -18 NPT	19
<b>G HB 04 IN 06</b>	G 1/4" -19	3/8" -18 NPT	24
<b>G HB 06 IN 04</b>	G 3/8" -19	1/4" -18 NPT	22
<b>G HB 06 IN</b>	G 3/8" -19	3/8" -18 NPT	24
<b>G HB 08 IN</b>	G 1/2" -14	1/2" -14 NPT	27
<b>G HB 12 IN</b>	G 3/4" -14	3/4" -14 NPT	36
<b>G HB 16 IN</b>	G 1" -11	1" -11.5 NPT	41
<b>G HB 20 IN</b>	G 1.1/4" -11	1.1/4" -11.5 NPT	50
<b>G HB 24 IN</b>	G 1.1/2" -11	1.1/2" -11.5 NPT	55

AF = Width across flats

### Product versions

<b>G HB IN VA</b>	Screw-on socket, Stainless steel
-------------------	----------------------------------