
G HB IN VA


Screw-on socket

HANSA-FLEX

Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	60° inner cone
Connection 2	NPT internal thread
Sealing form 2	thread seal
Design	Screw-on socket
Construction	straight
Material	Stainless steel

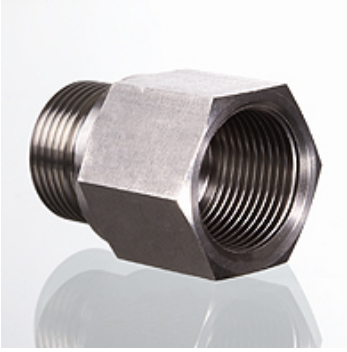



Item

Identification	G1	G2	AF (mm)
G HB 02 IN VA	G 1/8" -28	1/8" -27 NPT	14
G HB 02 IN 04 VA	G 1/8" -28	1/4" -18 NPT	19
G HB 04 IN 02 VA	G 1/4" -19	1/8" -27 NPT	19
G HB 04 IN VA	G 1/4" -19	1/4" -18 NPT	19
G HB 04 IN 06 VA	G 1/4" -19	3/8" -18 NPT	24
G HB 04 IN 08 VA	G 1/4" -19	1/2" -14 NPT	27
G HB 06 IN 04 VA	G 3/8" -19	1/4" -18 NPT	22
G HB 06 IN VA	G 3/8" -19	3/8" -18 NPT	24
G HB 06 IN 08 VA	G 3/8" -19	1/2" -14 NPT	27
G HB 08 IN 04 VA	G 1/2" -14	1/4" -18 NPT	27
G HB 08 IN 06 VA	G 1/2" -14	3/8" -18 NPT	27
G HB 08 IN VA	G 1/2" -14	1/2" -14 NPT	27
G HB 08 IN 12 VA	G 1/2" -14	3/4" -14 NPT	36
G HB 12 IN 06 VA	G 3/4" -14	3/8" -18 NPT	32
G HB 12 IN 08 VA	G 3/4" -14	1/2" -14 NPT	32
G HB 12 IN VA	G 3/4" -14	3/4" -14 NPT	36
G HB 12 IN 16 VA	G 3/4" -14	1" -11.5 NPT	36
G HB 16 IN 08 VA	G 1" -11	1/2" -14 NPT	41
G HB 16 IN 12 VA	G 1" -11	3/4" -14 NPT	41
G HB 16 IN VA	G 1" -11	1" -11.5 NPT	41
G HB 20 IN 16 VA	G 1.1/4" -11	1" -11.5 NPT	50
G HB 20 IN VA	G 1.1/4" -11	1.1/4" -11.5 NPT	50
G HB 24 IN VA	G 1.1/2" -11	1.1/2" -11.5 NPT	55
G HB 32 IN VA	G 2" -11	2" -11.5 NPT	60

AF = Width across flats

Product versions

G HB IN	Screw-on socket, Steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.