

G HB IN VA

Screw-on socket

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 60° inner cone



Connection 2 NPT internal thread

Sealing form 2 thread seal

Design Screw-on socket

Construction straight

Material Stainless steel

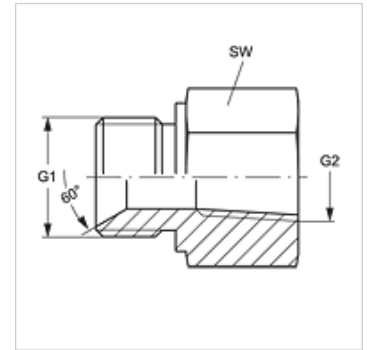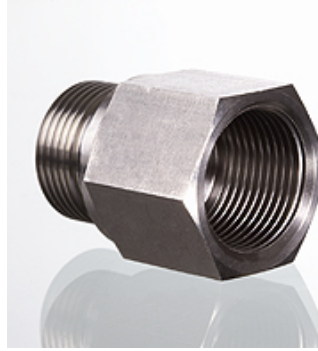

Item

| Identification | G1 | G2 | AF (mm) |
|------------------|--------------|------------------|------------|
| G HB 02 IN VA | G 1/8" -28 | 1/8" -27 NPT | 14 |
| G HB 02 IN 04 VA | G 1/8" -28 | 1/4" -18 NPT | 19 |
| G HB 04 IN 02 VA | G 1/4" -19 | 1/8" -27 NPT | 19 |
| G HB 04 IN VA | G 1/4" -19 | 1/4" -18 NPT | 19 |
| G HB 04 IN 06 VA | G 1/4" -19 | 3/8" -18 NPT | 24 |
| G HB 04 IN 08 VA | G 1/4" -19 | 1/2" -14 NPT | 27 |
| G HB 06 IN 04 VA | G 3/8" -19 | 1/4" -18 NPT | 22 |
| G HB 06 IN VA | G 3/8" -19 | 3/8" -18 NPT | 24 |
| G HB 06 IN 08 VA | G 3/8" -19 | 1/2" -14 NPT | 27 |
| G HB 08 IN 04 VA | G 1/2" -14 | 1/4" -18 NPT | 27 |
| G HB 08 IN 06 VA | G 1/2" -14 | 3/8" -18 NPT | 27 |
| G HB 08 IN VA | G 1/2" -14 | 1/2" -14 NPT | 27 |
| G HB 08 IN 12 VA | G 1/2" -14 | 3/4" -14 NPT | 36 |
| G HB 12 IN 06 VA | G 3/4" -14 | 3/8" -18 NPT | 32 |
| G HB 12 IN 08 VA | G 3/4" -14 | 1/2" -14 NPT | 32 |
| G HB 12 IN VA | G 3/4" -14 | 3/4" -14 NPT | 36 |
| G HB 12 IN 16 VA | G 3/4" -14 | 1" -11.5 NPT | 36 |
| G HB 16 IN 08 VA | G 1" -11 | 1/2" -14 NPT | 41 |
| G HB 16 IN 12 VA | G 1" -11 | 3/4" -14 NPT | 41 |
| G HB 16 IN VA | G 1" -11 | 1" -11.5 NPT | 41 |
| G HB 20 IN 16 VA | G 1.1/4" -11 | 1" -11.5 NPT | 50 |
| G HB 20 IN VA | G 1.1/4" -11 | 1.1/4" -11.5 NPT | 50 |
| G HB 24 IN VA | G 1.1/2" -11 | 1.1/2" -11.5 NPT | 55 |
| G HB 32 IN VA | G 2" -11 | 2" -11.5 NPT | 60 |

AF = Width across flats

Product versions

G HB IN Screw-on socket, Steel