

# G HB IR VA

Screw-on socket

## Properties

**Connection 1** BSP external thread, cylindrical

**Sealing form 1** 60° inner cone



**Connection 2** BSP cylindrical internal threads

**Sealing form 2** Flat seal

**Design** Screw-on socket

**Construction** straight

**Material** Stainless steel

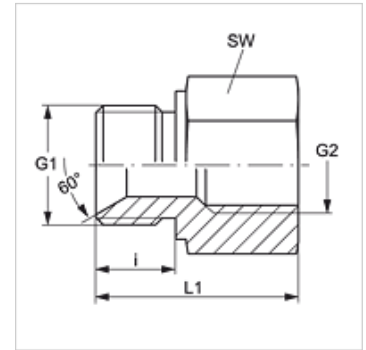

## Item

Identification	G1	G2	AF (mm)
G HB 02 IR VA	G 1/8" -28	G 1/8" -28	17
G HB 04 IR VA	G 1/4" -19	G 1/4" -19	19
G HB 06 IR VA	G 3/8" -19	G 3/8" -19	24
G HB 08 IR VA	G 1/2" -14	G 1/2" -14	27
G HB 12 IR VA	G 3/4" -14	G 3/4" -14	32
G HB 16 IR VA	G 1" -11	G 1" -11	41
G HB 20 IR VA	G 1.1/4" -11	G 1.1/4" -11	50
G HB 24 IR VA	G 1.1/2" -11	G 1.1/2" -11	55
G HB 32 IR VA	G 2" -11	G 2" -11	70

AF = Width across flats

## Product versions

G HB IR Screw-on socket, Steel