
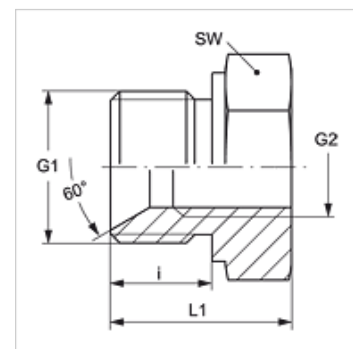


G HB IR L

Screw-on socket

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | 60° inner cone |
| Connection 2 | BSP cylindrical internal threads |
| Sealing form 2 | Flat seal |
| Design | Screw-on socket, long |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |



Item

| Identification | G1 | G2 | i (mm) | L1 (mm) | AF (mm) |
|------------------------|--------------|--------------|-----------|------------|------------|
| G HB 06 IR 04 L | G 3/8" -19 | G 1/4" -19 | 12,0 | 30,5 | 22 |
| G HB 08 IR 06 L | G 1/2" -14 | G 3/8" -19 | 16,0 | 38,0 | 30 |
| G HB 16 IR 08 L | G 1" -11 | G 1/2" -14 | 19,0 | 50,0 | 41 |
| G HB 16 IR 12 L | G 1" -11 | G 3/4" -14 | 20,5 | 47,5 | 41 |
| G HB 20 IR 16 L | G 1.1/4" -11 | G 1" -11 | 20,0 | 48,0 | 50 |
| G HB 24 IR 20 L | G 1.1/2" -11 | G 1.1/4" -11 | 22,0 | 54,5 | 55 |

AF = Width across flats