


G HJOF VA

Connection sockets

Properties

Connection 1	ORFS external threads
Sealing form 1	flat seal with O-ring
Connection 2	ORFS external threads
Sealing form 2	flat seal with O-ring
Design	Connection sockets
Construction	straight
Material	Stainless steel

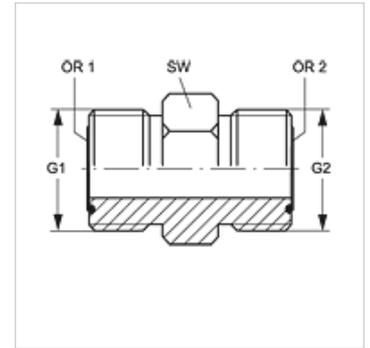

Ordering information

Seals of NBR
FPM (Viton) on request

Item

Identification	G1	G2	AF (mm)	OR1	OR2
G HJOF 04 VA	9/16"-18 UNF	9/16"-18 UNF	16	7.65 x 1.78	7.65 x 1.78
G HJOF 06 VA	11/16" -16 UN	11/16" -16 UN	19	9.25 x 1.78	9.25 x 1.78
G HJOF 08 VA	13/16" -16 UN	13/16" -16 UN	22	12.42 x 1.78	12.42 x 1.78
G HJOF 10 VA	1" -14 UNS	1" -14 UNS	27	15.60 x 1.78	15.60 x 1.78
G HJOF 12 VA	1.3/16" -12 UN	1.3/16" -12 UN	32	18.77 x 1.78	18.77 x 1.78
G HJOF 16 VA	1.7/16" -12 UN	1.7/16" -12 UN	38	23.52 x 1.78	23.52 x 1.78
G HJOF 20 VA	1.11/16" -12 UN	1.11/16" -12 UN	46	29.87 x 1.78	29.87 x 1.78
G HJOF 24 VA	2" -12 UN	2" -12 UN	55	37.82 x 1.78	37.82 x 1.78

AF = Width across flats

Product versions

G HJOF