
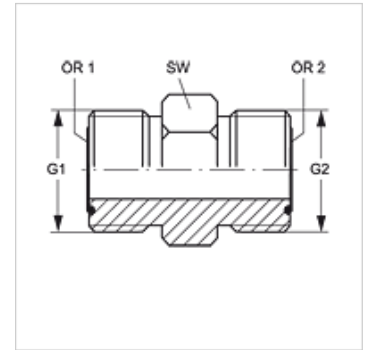


# G HJOF VA

## Connection sockets

### Properties

<b>Connection 1</b>	ORFS external threads
<b>Sealing form 1</b>	flat seal with O-ring
<b>Connection 2</b>	ORFS external threads
<b>Sealing form 2</b>	flat seal with O-ring
<b>Design</b>	Connection sockets
<b>Construction</b>	straight
<b>Material</b>	Stainless steel



### Ordering information

Seals of NBR  
FPM (Viton) on request

Item	G1	G2	AF (mm)	OR1	OR2
<b>G HJOF 04 VA</b>	9/16"-18 UNF	9/16"-18 UNF	16	7.65 x 1.78	7.65 x 1.78
<b>G HJOF 06 VA</b>	11/16" -16 UN	11/16" -16 UN	19	9.25 x 1.78	9.25 x 1.78
<b>G HJOF 08 VA</b>	13/16" -16 UN	13/16" -16 UN	22	12.42 x 1.78	12.42 x 1.78
<b>G HJOF 10 VA</b>	1" -14 UNS	1" -14 UNS	27	15.60 x 1.78	15.60 x 1.78
<b>G HJOF 12 VA</b>	1.3/16" -12 UN	1.3/16" -12 UN	32	18.77 x 1.78	18.77 x 1.78
<b>G HJOF 16 VA</b>	1.7/16" -12 UN	1.7/16" -12 UN	38	23.52 x 1.78	23.52 x 1.78
<b>G HJOF 20 VA</b>	1.11/16" -12 UN	1.11/16" -12 UN	46	29.87 x 1.78	29.87 x 1.78
<b>G HJOF 24 VA</b>	2" -12 UN	2" -12 UN	55	37.82 x 1.78	37.82 x 1.78

AF = Width across flats

### Product versions

G HJOF