


# G HJOF VA

## Connection sockets

### Properties

|                       |                       |
|-----------------------|-----------------------|
| <b>Connection 1</b>   | ORFS external threads |
| <b>Sealing form 1</b> | flat seal with O-ring |
| <b>Connection 2</b>   | ORFS external threads |
| <b>Sealing form 2</b> | flat seal with O-ring |
| <b>Design</b>         | Connection sockets    |
| <b>Construction</b>   | straight              |
| <b>Material</b>       | Stainless steel       |

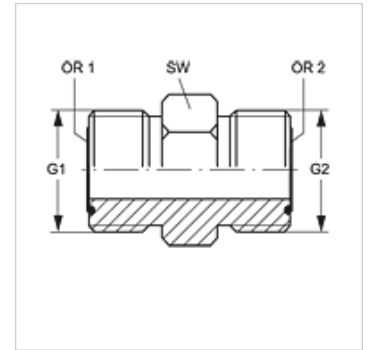

### Ordering information

Seals of NBR  
FPM (Viton) on request

| Item                | G1              | G2              | AF<br>(mm) | OR1          | OR2          |
|---------------------|-----------------|-----------------|------------|--------------|--------------|
| <b>G HJOF 04 VA</b> | 9/16"-18 UNF    | 9/16"-18 UNF    | 16         | 7.65 x 1.78  | 7.65 x 1.78  |
| <b>G HJOF 06 VA</b> | 11/16" -16 UN   | 11/16" -16 UN   | 19         | 9.25 x 1.78  | 9.25 x 1.78  |
| <b>G HJOF 08 VA</b> | 13/16" -16 UN   | 13/16" -16 UN   | 22         | 12.42 x 1.78 | 12.42 x 1.78 |
| <b>G HJOF 10 VA</b> | 1" -14 UNS      | 1" -14 UNS      | 27         | 15.60 x 1.78 | 15.60 x 1.78 |
| <b>G HJOF 12 VA</b> | 1.3/16" -12 UN  | 1.3/16" -12 UN  | 32         | 18.77 x 1.78 | 18.77 x 1.78 |
| <b>G HJOF 16 VA</b> | 1.7/16" -12 UN  | 1.7/16" -12 UN  | 38         | 23.52 x 1.78 | 23.52 x 1.78 |
| <b>G HJOF 20 VA</b> | 1.11/16" -12 UN | 1.11/16" -12 UN | 46         | 29.87 x 1.78 | 29.87 x 1.78 |
| <b>G HJOF 24 VA</b> | 2" -12 UN       | 2" -12 UN       | 55         | 37.82 x 1.78 | 37.82 x 1.78 |

AF = Width across flats

### Product versions

G HJOF