
G IN HJ
Connection sockets

Properties

Connection 1	NPT internal thread
Sealing form 1	thread seal
Connection 2	UN/UNF external threads
Sealing form 2	74° outer cone
Design	Connection sockets
Construction	straight
Material	Steel
Surface	electro galvanised



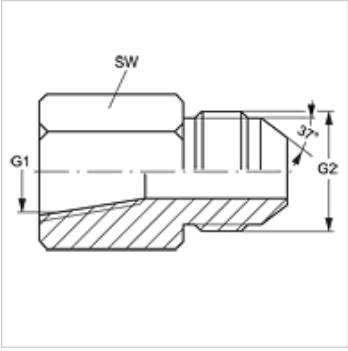

Item

Identification	G1	G2	AF (mm)
G IN 02 HJ 04	1/8" -27 NPT	7/16"-20 UNF	14
G IN 02 HJ 05	1/8" -27 NPT	1/2"-20 UNF	14
G IN 04 HJ	1/4" -18 NPT	7/16"-20 UNF	19
G IN 04 HJ 05	1/4" -18 NPT	1/2"-20 UNF	19
G IN 04 HJ 06	1/4" -18 NPT	9/16"-18 UNF	19
G IN 04 HJ 08	1/4" -18 NPT	3/4"-16 UNF	21
G IN 06 HJ	3/8" -18 NPT	9/16"-18 UNF	22
G IN 06 HJ 08	3/8" -18 NPT	3/4"-16 UNF	22
G IN 06 HJ 10	3/8" -18 NPT	7/8"-14 UNF	29
G IN 08 HJ	1/2" -14 NPT	3/4"-16 UNF	29
G IN 08 HJ 10	1/2" -14 NPT	7/8"-14 UNF	29
G IN 08 HJ 12	1/2" -14 NPT	1.1/16" -12 UN	29
G IN 12 HJ	3/4" -14 NPT	1.1/16" -12 UN	35
G IN 12 HJ 14	3/4" -14 NPT	1.3/16" -12 UN	35
G IN 16 HJ	1" -11.5 NPT	1.5/16" -12 UN	41
G IN 20 HJ	1.1/4" -11.5 NPT	1.5/8" -12 UN	50
G IN 24 HJ	1.1/2" -11.5 NPT	1.7/8" -12 UN	60
G IN 32 HJ	2" -11.5 NPT	2.1/2" -12 UN	73

AF = Width across flats

Product versions

G IN HJ VA	Connection sockets, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.