
GE HMED HJ

Screw-in sockets

Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	Shape E
Connection 2	UN/UNF external threads
Sealing form 2	74° outer cone
Design	Screw-in sockets
Construction	straight
Material	Steel
Surface	electro galvanised



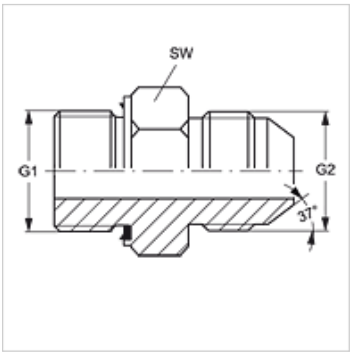

Item

Identification	G1	G2	AF (mm)
GE HMED 10 HJ 04	M 10 x 1	7/16" -20 UN	14
GE HMED 12 HJ 05	M 12 x 1.5	1/2"-20 UNF	17
GE HMED 12 HJ 06	M 12 x 1.5	9/16"-18 UNF	17
GE HMED 14 HJ 06	M 14 x 1.5	9/16"-18 UNF	19
GE HMED 16 HJ 06	M 16 x 1.5	9/16"-18 UNF	22
GE HMED 16 HJ 08	M 16 x 1.5	3/4"-16 UNF	22
GE HMED 18 HJ 08	M 18 x 1.5	3/4"-16 UNF	24
GE HMED 18 HJ 10	M 18 x 1.5	7/8"-14 UNF	24
GE HMED 22 HJ 10	M 22 x 1.5	7/8"-14 UNF	27
GE HMED 22 HJ 12	M 22 x 1.5	1.1/16" -12 UN	27
GE HMED 27 HJ 12	M 27 x 2	1.1/16" -12 UN	32
GE HMED 33 HJ 16	M 33 x 2	1.5/16" -12 UN	41
GE HMED 42HJ 20	M 42 x 2	1.5/8" -12 UN	50
GE HMED 48 H J24	M 48 x 2	1.7/8" -12 UN	55

AF = Width across flats

Spare parts

WD	Soft seal for ED fittings

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.