

# GE HMED HJ

## Screw-in sockets

### Properties

**Connection 1** metric cylindrical outer thread

**Sealing form 1** Shape E

**Connection 2** UN/UNF external threads


**Sealing form 2** 74° outer cone

**Design** Screw-in sockets

**Construction** straight

**Material** Steel

**Surface** electro galvanised

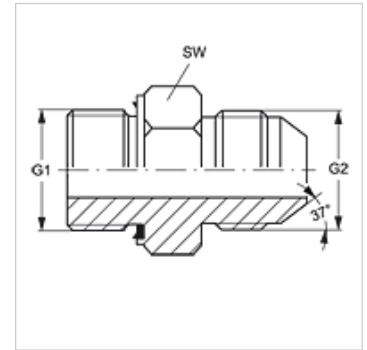

### Item

| Identification   | G1         | G2             | AF<br>(mm) |
|------------------|------------|----------------|------------|
| GE HMED 10 HJ 04 | M 10 x 1   | 7/16" -20 UN   | 14         |
| GE HMED 12 HJ 05 | M 12 x 1.5 | 1/2" -20 UNF   | 17         |
| GE HMED 12 HJ 06 | M 12 x 1.5 | 9/16" -18 UNF  | 17         |
| GE HMED 14 HJ 06 | M 14 x 1.5 | 9/16" -18 UNF  | 19         |
| GE HMED 16 HJ 06 | M 16 x 1.5 | 9/16" -18 UNF  | 22         |
| GE HMED 16 HJ 08 | M 16 x 1.5 | 3/4" -16 UNF   | 22         |
| GE HMED 18 HJ 08 | M 18 x 1.5 | 3/4" -16 UNF   | 24         |
| GE HMED 18 HJ 10 | M 18 x 1.5 | 7/8" -14 UNF   | 24         |
| GE HMED 22 HJ 10 | M 22 x 1.5 | 7/8" -14 UNF   | 27         |
| GE HMED 22 HJ 12 | M 22 x 1.5 | 1.1/16" -12 UN | 27         |
| GE HMED 27 HJ 12 | M 27 x 2   | 1.1/16" -12 UN | 32         |
| GE HMED 33 HJ 16 | M 33 x 2   | 1.5/16" -12 UN | 41         |
| GE HMED 42 HJ 20 | M 42 x 2   | 1.5/8" -12 UN  | 50         |
| GE HMED 48 H J24 | M 48 x 2   | 1.7/8" -12 UN  | 55         |

AF = Width across flats

### Spare parts

**WD** Soft seal for ED fittings