

GE HMED HJOF

Screw-in sockets

Properties

Connection 1 metric cylindrical outer thread

Sealing form 1 Shape E

Connection 2 ORFS external threads


Sealing form 2 flat seal with O-ring

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

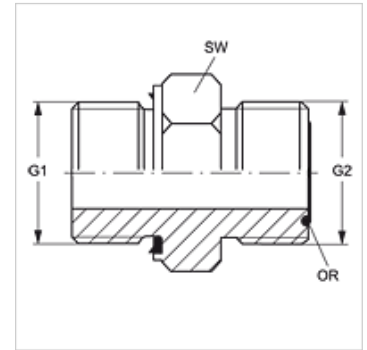

Item

| Identification | G1 | G2 | AF (mm) | OR |
|--------------------|------------|-----------------|------------|--------------|
| GE HMED 10 HJOF 04 | M 10 x 1 | 9/16"-18 UNF | 17 | 7.65 x 1.78 |
| GE HMED 12 HJOF 06 | M 12 x 1.5 | 11/16" -16 UN | 19 | 9.25 x 1.78 |
| GE HMED 14 HJOF 06 | M 14 x 1.5 | 11/16" -16 UN | 19 | 9.25 x 1.78 |
| GE HMED 18 HJOF 08 | M 18 x 1.5 | 13/16" -16 UN | 24 | 12.42 x 1.78 |
| GE HMED 22 HJOF 10 | M 22 x 1.5 | 1" -14 UNS | 27 | 15.60 x 1.78 |
| GE HMED 27 HJOF 12 | M 27 x 2 | 1.3/16" -12 UN | 32 | 18.77 x 1.78 |
| GE HMED 33 HJOF 16 | M 33 x 2 | 1.7/16" -12 UN | 41 | 23.52 x 1.78 |
| GE HMED 42 HJOF 20 | M 42 x 2 | 1.11/16" -12 UN | 50 | 29.87 x 1.78 |

AF = Width across flats

Spare parts

WD Soft seal for ED fittings