

# GE HMO HB

## Screw-in sockets

### Properties

**Connection 1** metric cylindrical outer thread

**Sealing form 1** O-ring seal on screw-in socket

**Connection 2** BSP cylindrical external threads


**Sealing form 2** 60° inner cone

**Design** Screw-in sockets

**Construction** straight

**Material** Steel

**Surface** electro galvanised

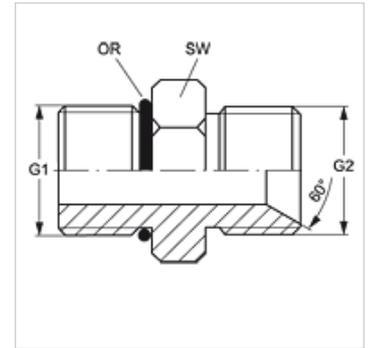

### Item

| Identification  | G1         | G2           | AF<br>(mm) | OR           |
|-----------------|------------|--------------|------------|--------------|
| GE HMO 10 HB 02 | M 10 x 1   | G 1/8" -28   | 15         | 8.00 x 1.50  |
| GE HMO 12 HB 02 | M 12 x 1.5 | G 1/8" -28   | 18         | 9.30 x 2.30  |
| GE HMO 12 HB 04 | M 12 x 1.5 | G 1/4" -19   | 18         | 9.30 x 2.30  |
| GE HMO 14 HB 04 | M 14 x 1.5 | G 1/4" -19   | 20         | 11.30 x 2.30 |
| GE HMO 14 HB 06 | M 14 x 1.5 | G 3/8" -19   | 20         | 11.30 x 2.30 |
| GE HMO 16 HB 04 | M 16 x 1.5 | G 1/4" -19   | 22         | 13.30 x 2.30 |
| GE HMO 16 HB 06 | M 16 x 1.5 | G 3/8" -19   | 22         | 13.30 x 2.30 |
| GE HMO 18 HB 06 | M 18 x 1.5 | G 3/8" -19   | 24         | 15.30 x 2.30 |
| GE HMO 18 HB 08 | M 18 x 1.5 | G 1/2" -14   | 24         | 15.30 x 2.30 |
| GE HMO 20 HB 08 | M 20 x 1.5 | G 1/2" -14   | 28         | 17.30 x 2.30 |
| GE HMO 22 HB 08 | M 22 x 1.5 | G 1/2" -14   | 28         | 19.30 x 2.30 |
| GE HMO 22 HB 10 | M 22 x 1.5 | G 5/8" -14   | 28         | 19.30 x 2.30 |
| GE HMO 22 HB 12 | M 22 x 1.5 | G 3/4" -14   | 28         | 19.30 x 2.30 |
| GE HMO 27 HB 12 | M 27 x 2   | G 3/4" -14   | 33         | 23.47 x 2.95 |
| GE HMO 27 HB 16 | M 27 x 2   | G 1" -11     | 33         | 23.47 x 2.95 |
| GE HMO 33 HB 16 | M 33 x 2   | G 1" -11     | 42         | 29.74 x 2.95 |
| GE HMO 42 HB 20 | M 42 x 2   | G 1.1/4" -11 | 50         | 38.00 x 3.00 |
| GE HMO 48 HB 24 | M 48 x 2   | G 1.1/2" -11 | 56         | 44.00 x 3.00 |

AF = Width across flats