


GE HMOK HB

Screw-in sockets

Properties

| | |
|-----------------------|---|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 | BSP cylindrical external threads |
| Sealing form 2 | 60° inner cone |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

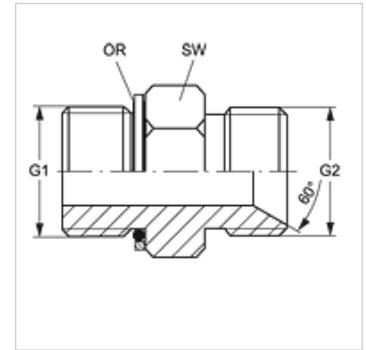

Item

| Identification | G1 | G2 | AF (mm) | OR |
|------------------|------------|--------------|------------|------------|
| GE HMOK 10 HB 02 | M 10 x 1 | G 1/8" -28 | 14 | 8.1 x 1.6 |
| GE HMOK 12 HB 02 | M 12 x 1.5 | G 1/8" -28 | 17 | 9.3 x 2.2 |
| GE HMOK 12 HB 04 | M 12 x 1.5 | G 1/4" -19 | 19 | 9.3 x 2.2 |
| GE HMOK 14 HB 04 | M 14 x 1.5 | G 1/4" -19 | 19 | 11.3 x 2.2 |
| GE HMOK 14 HB 06 | M 14 x 1.5 | G 3/8" -19 | 22 | 11.3 x 2.2 |
| GE HMOK 16 HB 04 | M 16 x 1.5 | G 1/4" -19 | 22 | 13.3 x 2.2 |
| GE HMOK 16 HB 06 | M 16 x 1.5 | G 3/8" -19 | 22 | 13.3 x 2.2 |
| GE HMOK 18 HB 06 | M 18 x 1.5 | G 3/8" -19 | 24 | 15.3 x 2.2 |
| GE HMOK 18 HB 08 | M 18 x 1.5 | G 1/2" -14 | 24 | 15.3 x 2.2 |
| GE HMOK 20 HB 08 | M 20 x 1.5 | G 1/2" -14 | 27 | 17.3 x 2.2 |
| GE HMOK 22 HB 08 | M 22 x 1.5 | G 1/2" -14 | 27 | 19.3 x 2.2 |
| GE HMOK 22 HB 10 | M 22 x 1.5 | G 5/8" -14 | 27 | 19.3 x 2.2 |
| GE HMOK 22 HB 12 | M 22 x 1.5 | G 3/4" -14 | 32 | 19.3 x 2.2 |
| GE HMOK 26 HB 12 | M 26 x 1.5 | G 3/4" -14 | 32 | 23.6 x 2.9 |
| GE HMOK 27 HB 12 | M 27 x 2 | G 3/4" -14 | 32 | 23.6 x 2.9 |
| GE HMOK 27 HB 16 | M 27 x 2 | G 1" -11 | 41 | 23.6 x 2.9 |
| GE HMOK 33 HB 16 | M 33 x 2 | G 1" -11 | 41 | 29.6 x 2.9 |
| GE HMOK 42 HB 20 | M 42 x 2 | G 1.1/4" -11 | 50 | 38.6 x 2.9 |
| GE HMOK 48 HB 24 | M 48 x 2 | G 1.1/2" -11 | 55 | 44.6 x 2.9 |

AF = Width across flats

Spare parts

KAMMRING M Diaphragm ring, metric