


GE HN HJ VA

Screw-in sockets

HANSA FLEX

Properties

| | |
|-----------------------|-------------------------|
| Connection 1 | NPT external threads |
| Sealing form 1 | thread seal |
| Connection 2 | UN/UNF external threads |
| Sealing form 2 | 74° outer cone |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Stainless steel |

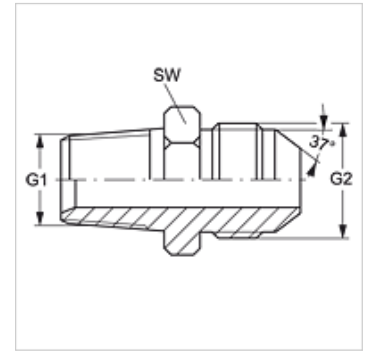

Item

| Identification | G1 | G2 | AF (mm) |
|-------------------|------------------|----------------|------------|
| GE HN 02 HJ 04 VA | 1/8" -27 NPT | 7/16"-20 UNF | 13 |
| GE HN 02 HJ 05 VA | 1/8" -27 NPT | 1/2"-20 UNF | 14 |
| GE HN 02 HJ 06 VA | 1/8" -27 NPT | 9/16"-18 UNF | 16 |
| GE HN 04 HJ VA | 1/4" -18 NPT | 7/16"-20 UNF | 14 |
| GE HN 04 HJ 05 VA | 1/4" -18 NPT | 1/2"-20 UNF | 14 |
| GE HN 04 HJ 06 VA | 1/4" -18 NPT | 9/16"-18 UNF | 16 |
| GE HN 04 HJ 08 VA | 1/4" -18 NPT | 3/4"-16 UNF | 19 |
| GE HN 06 HJ VA | 3/8" -18 NPT | 9/16"-18 UNF | 19 |
| GE HN 06 HJ 04 VA | 3/8" -18 NPT | 7/16"-20 UNF | 19 |
| GE HN 06 HJ 05 VA | 3/8" -18 NPT | 1/2"-20 UNF | 19 |
| GE HN 06 HJ 08 VA | 3/8" -18 NPT | 3/4"-16 UNF | 19 |
| GE HN 06 HJ 10 VA | 3/8" -18 NPT | 7/8"-14 UNF | 24 |
| GE HN 08 HJ 04 VA | 1/2" -14 NPT | 7/16"-20 UNF | 22 |
| GE HN 08 HJ 06 VA | 1/2" -14 NPT | 9/16"-18 UNF | 22 |
| GE HN 08 HJ VA | 1/2" -14 NPT | 3/4"-16 UNF | 22 |
| GE HN 08 HJ 10 VA | 1/2" -14 NPT | 7/8"-14 UNF | 24 |
| GE HN 08 HJ 12 VA | 1/2" -14 NPT | 1.1/16" -12 UN | 27 |
| GE HN 08 HJ 16 VA | 1/2" -14 NPT | 1.5/16" -12 UN | 35 |
| GE HN 12 HJ 08 VA | 3/4" -14 NPT | 3/4"-16 UNF | 27 |
| GE HN 12 HJ 10 VA | 3/4" -14 NPT | 7/8"-14 UNF | 27 |
| GE HN 12 HJ VA | 3/4" -14 NPT | 1.1/16" -12 UN | 27 |
| GE HN 12 HJ 16 VA | 3/4" -14 NPT | 1.5/16" -12 UN | 36 |
| GE HN 16 HJ VA | 1" -11.5 NPT | 1.5/16" -12 UN | 36 |
| GE HN 16 HJ 12 VA | 1" -11.5 NPT | 1.1/16" -12 UN | 36 |
| GE HN 16 HJ 20 VA | 1" -11.5 NPT | 1.5/8" -12 UN | 46 |
| GE HN 20 HJ 16 VA | 1.1/4" -11.5 NPT | 1.5/16" -12 UN | 46 |
| GE HN 20 HJ VA | 1.1/4" -11.5 NPT | 1.5/8" -12 UN | 46 |
| GE HN 20 HJ 24 VA | 1.1/4" -11.5 NPT | 1.7/8" -12 UN | 50 |
| GE HN 24 HJ 20 VA | 1.1/2" -11.5 NPT | 1.5/8" -12 UN | 50 |
| GE HN 24 HJ VA | 1.1/2" -11.5 NPT | 1.7/8" -12 UN | 50 |

AF = Width across flats

Product versions

GE HN HJ Screw-in sockets, Steel