


GE HN IR VA

Screw-in sockets

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | NPT external threads |
| Sealing form 1 | thread seal |
| Connection 2 | BSP cylindrical internal threads |
| Sealing form 2 | Flat seal |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Stainless steel |

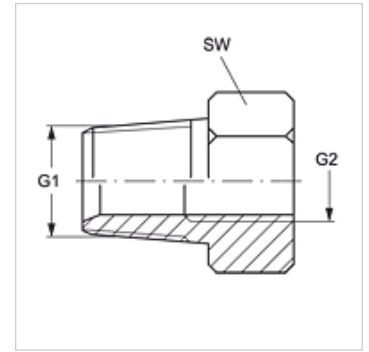

Item

| Identification | G1 | G2 | AF (mm) |
|-------------------|------------------|--------------|------------|
| GE HN 02 IR VA | 1/8" -27 NPT | G 1/8" -28 | 14 |
| GE HN 02 IR 04 VA | 1/8" -27 NPT | G 1/4" -19 | 19 |
| GE HN 04 IR 02 VA | 1/4" -18 NPT | G 1/8" -28 | 14 |
| GE HN 04 IR VA | 1/4" -18 NPT | G 1/4" -19 | 19 |
| GE HN 04 IR 06 VA | 1/4" -18 NPT | G 3/8" -19 | 24 |
| GE HN 04 IR 08 VA | 1/4" -18 NPT | G 1/2" -14 | 27 |
| GE HN 06 IR 04 VA | 3/8" -18 NPT | G 1/4" -19 | 19 |
| GE HN 06 IR VA | 3/8" -18 NPT | G 3/8" -19 | 24 |
| GE HN 06 IR 08 VA | 3/8" -18 NPT | G 1/2" -14 | 27 |
| GE HN 08 IR 04 VA | 1/2" -14 NPT | G 1/4" -19 | 24 |
| GE HN 08 IR 06 VA | 1/2" -14 NPT | G 3/8" -19 | 24 |
| GE HN 08 IR VA | 1/2" -14 NPT | G 1/2" -14 | 27 |
| GE HN 08 IR 12 VA | 1/2" -14 NPT | G 3/4" -14 | 32 |
| GE HN 12 IR 06 VA | 3/4" -14 NPT | G 3/8" -19 | 27 |
| GE HN 12 IR 08 VA | 3/4" -14 NPT | G 1/2" -14 | 27 |
| GE HN 12 IR VA | 3/4" -14 NPT | G 3/4" -14 | 32 |
| GE HN 12 IR 16 VA | 3/4" -14 NPT | G 1" -11 | 41 |
| GE HN 16 IR 08 VA | 1" -11.5 NPT | G 1/2" -14 | 36 |
| GE HN 16 IR 12VA | 1" -11.5 NPT | G 3/4" -14 | 36 |
| GE HN 16 IR VA | 1" -11.5 NPT | G 1" -11 | 41 |
| GE HN 20 IR VA | 1.1/4" -11.5 NPT | G 1.1/4" -11 | 55 |
| GE HN 24 IR VA | 1.1/2" -11.5 NPT | G 1.1/2" -11 | 55 |

AF = Width across flats