

GE HRED AJ

Screw-in sockets

HANSA FLEX

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 Shape E

Connection 2 UN/UNF nut threads


Sealing form 2 74° inner cone

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

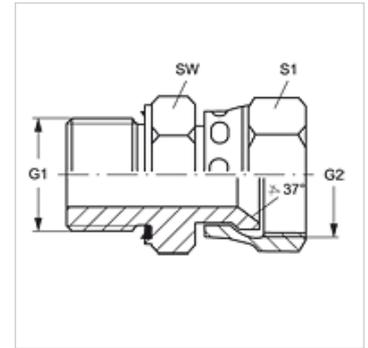

Item

| Identification | G1 | G2 | AF (mm) | S1 |
|------------------|--------------|----------------|------------|----|
| GE HRED 02 AJ 04 | G 1/8" -28 | 7/16"-20 UNF | 14 | 14 |
| GE HRED 02 AJ 05 | G 1/8" -28 | 1/2"-20 UNF | 14 | 17 |
| GE HRED 04 AJ 05 | G 1/4" -19 | 1/2"-20 UNF | 19 | 17 |
| GE HRED 04 AJ 06 | G 1/4" -19 | 9/16"-18 UNF | 19 | 19 |
| GE HRED 04 AJ 08 | G 1/4" -19 | 3/4"-16 UNF | 19 | 22 |
| GE HRED 06 AJ | G 3/8" -19 | 9/16"-18 UNF | 22 | 19 |
| GE HRED 06 AJ 08 | G 3/8" -19 | 3/4"-16 UNF | 22 | 22 |
| GE HRED 06 AJ 10 | G 3/8" -19 | 7/8"-14 UNF | 27 | 27 |
| GE HR ED 08 AJ | G 1/2" -14 | 3/4"-16 UNF | 27 | 22 |
| GE HRED 08 AJ 10 | G 1/2" -14 | 7/8"-14 UNF | 27 | 27 |
| GE HRED 08 AJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 27 | 32 |
| GE HRED 12 AJ | G 3/4" -14 | 1.1/16" -12 UN | 32 | 32 |
| GE HRED 12 AJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 32 | 41 |
| GE HRED 16 AJ | G 1" -11 | 1.5/16" -12 UN | 41 | 41 |
| GE HRED 16 AJ 20 | G 1" -11 | 1.5/8" -12 UN | 41 | 50 |
| GE HRED 20 AJ | G 1.1/4" -11 | 1.5/8" -12 UN | 50 | 50 |
| GE HRED 20 AJ 24 | G 1.1/4" -11 | 1.7/8" -12 UN | 50 | 60 |
| GE HRED 24 AJ | G 1.1/2" -11 | 1.7/8" -12 UN | 55 | 60 |

SW, S1, S2 = With across flats

Product versions

GE HRED AJ VA Screw-in sockets, Stainless steel

Spare parts

WD Soft seal for ED fittings