

# GE HRK AB VA

Screw-in sockets

**HANSA FLEX**

## Properties

**Connection 1** BSPT conical external threads

**Sealing form 1** thread seal


**Connection 2** BSP nut thread

**Sealing form 2** 60° inner cone

**Design** Screw-in sockets

**Construction** straight

**Material** Stainless steel

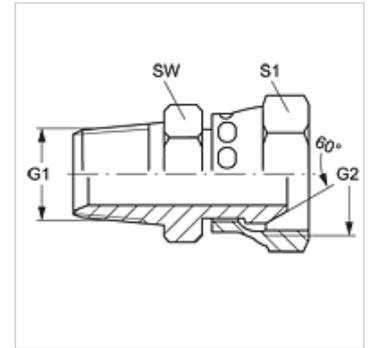

## Item

Identification	G1	G2	AF (mm)	S1
GE HRK 02 AB VA	R 1/8" K	G 1/8" -28	14	14
GE HRK 04 AB VA	R 1/4" K	G 1/4" -19	19	19
GE HRK 06 AB VA	R 3/8" K	G 3/8" -19	22	22
GE HRK 08 AB VA	R 1/2" K	G 1/2" -14	27	27
GE HRK 12 AB VA	R 3/4" K	G 3/4" -14	37	37
GE HRK 16 AB VA	R 1" K	G 1" -11	41	41
GE HRK 20 AB VA	R 1.1/4" K	G 1.1/4" -11	50	50
GE HRK 24 AB VA	R 1.1/2" K	G 1.1/2" -11	55	60
GE HRK 32 AB VA	R 2" K	G 2" -11	64	67

SW, S1, S2 = With across flats

## Product versions

GE HRK AB Screw-in sockets, Steel