

GE HRK HJ VA

Screw-in sockets

HANSA FLEX

Properties

Connection 1 BSPT conical external threads

Sealing form 1 thread seal


Connection 2 UN/UNF external threads

Sealing form 2 74° outer cone

Design Screw-in sockets

Construction straight

Material Stainless steel

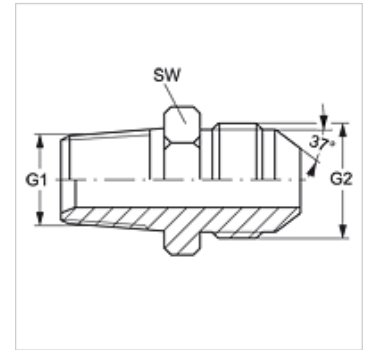

Item

| Identification | G1 | G2 | AF (mm) |
|--------------------|----------|----------------|------------|
| GE HRK 02 HJ 04 VA | R 1/8" K | 7/16"-20 UNF | 13 |
| GE HRK 04 HJ VA | R 1/4" K | 7/16"-20 UNF | 14 |
| GE HRK 04 HJ 05 VA | R 1/4" K | 1/2"-20 UNF | 14 |
| GE HRK 04 HJ 06 VA | R 1/4" K | 9/16"-18 UNF | 16 |
| GE HRK 06 HJ VA | R 3/8" K | 9/16"-18 UNF | 19 |
| GE HRK 06 HJ 08 VA | R 3/8" K | 3/4"-16 UNF | 19 |
| GE HRK 08 HJ 06 VA | R 1/2" K | 9/16"-18 UNF | 22 |
| GE HRK 08 HJ VA | R 1/2" K | 3/4"-16 UNF | 22 |
| GE HRK 08 HJ 10 VA | R 1/2" K | 7/8"-14 UNF | 24 |
| GE HRK 12 HJ VA | R 3/4" K | 1.1/16" -12 UN | 27 |

AF = Width across flats

Product versions

GE HRK HJ Screw-in sockets, Steel