


Properties

| | |
|----------------|-------------------------------|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | 60° inner cone |
| Connection 2 | NPT external threads |
| Sealing form 2 | thread seal |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

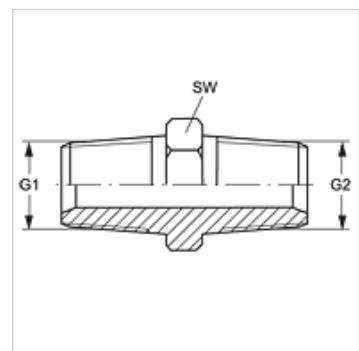

Item

| Identification | G1 | G2 | AF (mm) |
|-----------------|------------|------------------|------------|
| GE HRK 02 HN | R 1/8" K | 1/8" -27 NPT | 14 |
| GE HRK 04 HN | R 1/4" K | 1/4" -18 NPT | 19 |
| GE HRK 04 HN 06 | R 1/4" K | 3/8" -18 NPT | 19 |
| GE HRK 06 HN | R 3/8" K | 3/8" -18 NPT | 22 |
| GE HRK 06 HN 04 | R 3/8" K | 1/4" -18 NPT | 22 |
| GE HRK 08 HN | R 1/2" K | 1/2" -14 NPT | 27 |
| GE HRK 12 HN | R 3/4" K | 3/4" -14 NPT | 32 |
| GE HRK 16 HN | R 1" K | 1" -11.5 NPT | 41 |
| GE HRK 16 HN 12 | R 1" K | 3/4" -14 NPT | 41 |
| GE HRK 20 HN | R 1.1/4" K | 1.1/4" -11.5 NPT | 50 |
| GE HRK 20 HN 16 | R 1.1/4" K | 1" -11.5 NPT | 50 |
| GE HRK 24 HN | R 1.1/2" K | 1.1/2" -11.5 NPT | 55 |
| GE HRK 32 HN | R 2" K | 2" -11.5 NPT | 70 |

AF = Width across flats