

GE HRO AJ

Screw-in sockets

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 form G

Connection 2 UN/UNF nut threads


Sealing form 2 74° inner cone

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

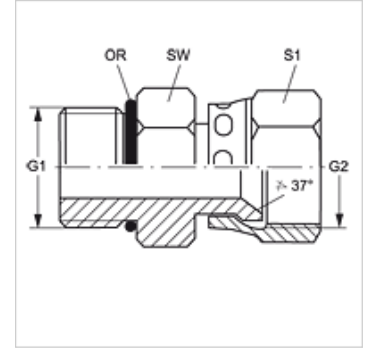

Item

| Identification | G1 | G2 | AF (mm) | S1 | OR |
|-----------------|--------------|----------------|------------|----|--------------|
| GE HRO 02 AJ 04 | G 1/8" -28 | 7/16"-20 UNF | 16 | 16 | 8.00 x 2.00 |
| GE HRO 04 AJ | G 1/4" -19 | 7/16"-20 UNF | 20 | 16 | 10.77 x 2.62 |
| GE HRO 04 AJ 05 | G 1/4" -19 | 1/2"-20 UNF | 20 | 17 | 10.77 x 2.62 |
| GE HRO 04 AJ 08 | G 1/4" -19 | 3/4"-16 UNF | 20 | 22 | 10.77 x 2.62 |
| GE HRO 06 AJ 04 | G 3/8" -19 | 7/16"-20 UNF | 24 | 16 | 13.94 x 2.62 |
| GE HRO 06 AJ 05 | G 3/8" -19 | 1/2"-20 UNF | 24 | 17 | 13.94 x 2.62 |
| GE HRO 06 AJ | G 3/8" -19 | 9/16"-18 UNF | 24 | 19 | 13.94 x 2.62 |
| GE HRO 06 AJ 08 | G 3/8" -19 | 3/4"-16 UNF | 24 | 22 | 13.94 x 2.62 |
| GE HRO 06 AJ 10 | G 3/8" -19 | 7/8"-14 UNF | 24 | 27 | 13.94 x 2.62 |
| GE HRO 08 AJ 06 | G 1/2" -14 | 9/16"-18 UNF | 28 | 19 | 17.86 x 2.62 |
| GE HRO 08 AJ | G 1/2" -14 | 3/4"-16 UNF | 28 | 22 | 17.86 x 2.62 |
| GE HRO 08 AJ 10 | G 1/2" -14 | 7/8"-14 UNF | 28 | 27 | 17.86 x 2.62 |
| GE HRO 08 AJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 28 | 32 | 17.86 x 2.62 |
| GE HRO 12 AJ 10 | G 3/4" -14 | 7/8"-14 UNF | 35 | 27 | 23.47 x 2.62 |
| GE HRO 12 AJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 35 | 38 | 23.47 x 2.62 |
| GE HRO 16 AJ 12 | G 1" -11 | 1.1/16" -12 UN | 43 | 32 | 29.74 x 3.53 |
| GE HRO 16 AJ 20 | G 1" -11 | 1.5/8" -12 UN | 43 | 50 | 29.74 x 3.53 |
| GE HRO 20 AJ 16 | G 1.1/4" -11 | 1.5/16" -12 UN | 52 | 38 | 37.69 x 3.53 |
| GE HRO 20 AJ 24 | G 1.1/4" -11 | 1.7/8" -12 UN | 52 | 58 | 37.69 x 3.53 |

SW, S1, S2 = With across flats