


GE HRO HB

Screw-in sockets

Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	form G
Connection 2	BSP cylindrical external threads
Sealing form 2	60° inner cone
Design	Screw-in sockets
Construction	straight
Material	Steel
Surface	electro galvanised

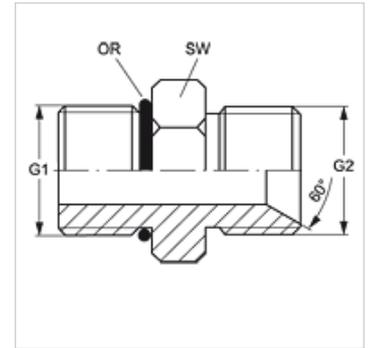

Item				
Identification	G1	G2	AF (mm)	OR
GE HRO 02 HB	G 1/8" -28	G 1/8" -28	20	7.65 x 1.78
GE HRO 04 HB 02	G 1/4" -19	G 1/8" -28	20	10.78 x 2.62
GE HRO 04 HB	G 1/4" -19	G 1/4" -19	20	10.78 x 2.62
GE HRO 04 HB 06	G 1/4" -19	G 3/8" -19	24	10.78 x 2.62
GE HRO 06 HB 04	G 3/8" -19	G 1/4" -19	24	13.94 x 2.62
GE HRO 06 HB	G 3/8" -19	G 3/8" -19	24	13.94 x 2.62
GE HRO 06 HB 08	G 3/8" -19	G 1/2" -14	29	13.94 x 2.62
GE HRO 08 HB 06	G 1/2" -14	G 3/8" -19	29	17.86 x 2.62
GE HRO 08 HB	G 1/2" -14	G 1/2" -14	28	17.86 x 2.62
GE HRO 08 HB 10	G 1/2" -14	G 5/8" -14	29	17.86 x 2.62
GE HRO 08 HB 12	G 1/2" -14	G 3/4" -14	29	17.86 x 2.62
GE HRO 12 HB 08	G 3/4" -14	G 1/2" -14	35	23.47 x 2.62
GE HRO 12 HB	G 3/4" -14	G 3/4" -14	35	23.47 x 2.62
GE HRO 12 HB 16	G 3/4" -14	G 1" -11	43	23.47 x 2.62
GE HRO 16 HB 12	G 1" -11	G 3/4" -14	43	29.74 x 3.53
GE HRO 16 HB	G 1" -11	G 1" -11	43	29.74 x 3.53
GE HRO 20 HB 16	G 1.1/4" -11	G 1" -11	53	37.69 x 3.53
GE HRO 20 HB	G 1.1/4" -11	G 1.1/4" -11	53	37.69 x 3.53
GE HRO 24 HB	G 1.1/2" -11	G 1.1/2" -11	58	44.04 x 3.53

AF = Width across flats