

GE HRO HJ

Screw-in sockets

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 form G

Connection 2 UN/UNF external threads



Sealing form 2 74° outer cone

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

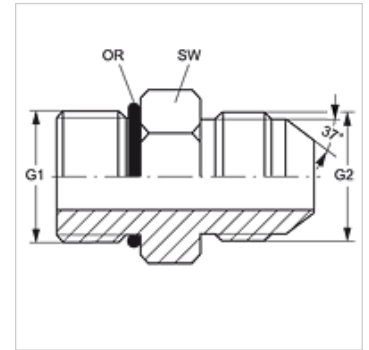

Item

| Identification | G1 | G2 | AF (mm) | OR |
|-----------------|--------------|----------------|------------|--------------|
| GE HRO 02 HJ 04 | G 1/8" -28 | 7/16"-20 UNF | 16 | 7.65 x 1.78 |
| GE HRO 02 HJ 05 | G 1/8" -28 | 1/2"-20 UNF | 16 | 7.65 x 1.78 |
| GE HRO 04 HJ | G 1/4" -19 | 7/16"-20 UNF | 19 | 10.78 x 2.62 |
| GE HRO 04 HJ 05 | G 1/4" -19 | 1/2"-20 UNF | 19 | 10.78 x 2.62 |
| GE HRO 04 HJ 06 | G 1/4" -19 | 9/16"-18 UNF | 19 | 10.78 x 2.62 |
| GE HRO 04 HJ 08 | G 1/4" -19 | 3/4"-16 UNF | 19 | 10.78 x 2.62 |
| GE HRO 06 HJ 04 | G 3/8" -19 | 7/16"-20 UNF | 24 | 13.94 x 2.62 |
| GE HRO 06 HJ 05 | G 3/8" -19 | 1/2"-20 UNF | 24 | 13.94 x 2.62 |
| GE HRO 06 HJ | G 3/8" -19 | 9/16"-18 UNF | 24 | 13.94 x 2.62 |
| GE HRO 06 HJ 08 | G 3/8" -19 | 3/4"-16 UNF | 24 | 13.94 x 2.62 |
| GE HRO 06 HJ 10 | G 3/8" -19 | 7/8"-14 UNF | 24 | 13.94 x 2.62 |
| GE HRO 08 HJ 04 | G 1/2" -14 | 7/16"-20 UNF | 28 | 17.86 x 2.62 |
| GE HRO 08 HJ 06 | G 1/2" -14 | 9/16"-18 UNF | 28 | 17.86 x 2.62 |
| GE HRO 08 HJ | G 1/2" -14 | 3/4"-16 UNF | 28 | 17.86 x 2.62 |
| GE HRO 08 HJ 10 | G 1/2" -14 | 7/8"-14 UNF | 28 | 17.86 x 2.62 |
| GE HRO 08 HJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 28 | 17.86 x 2.62 |
| GE HRO 12 HJ 08 | G 3/4" -14 | 3/4"-16 UNF | 35 | 23.47 x 2.62 |
| GE HRO 12 HJ | G 3/4" -14 | 1.1/16" -12 UN | 35 | 23.47 x 2.62 |
| GE HRO 12 HJ 14 | G 3/4" -14 | 1.3/16" -12 UN | 35 | 23.47 x 2.62 |
| GE HRO 12 HJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 35 | 23.47 x 2.62 |
| GE HRO 16 HJ 12 | G 1" -11 | 1.1/16" -12 UN | 43 | 29.74 x 3.53 |
| GE HRO 16 HJ | G 1" -11 | 1.5/16" -12 UN | 43 | 29.74 x 3.53 |
| GE HRO 16 HJ 20 | G 1" -11 | 1.5/8" -12 UN | 43 | 29.74 x 3.53 |
| GE HRO 20 HJ 16 | G 1.1/4" -11 | 1.5/16" -12 UN | 52 | 37.69 x 3.53 |
| GE HRO 20 HJ | G 1.1/4" -11 | 1.5/8" -12 UN | 52 | 37.69 x 3.53 |
| GE HRO 20 HJ 24 | G 1.1/4" -11 | 1.7/8" -12 UN | 52 | 37.69 x 3.53 |
| GE HRO 24 HJ | G 1.1/2" -11 | 1.7/8" -12 UN | 58 | 44.04 x 3.53 |

AF = Width across flats