


GE HROK AJ

Screw-in sockets

Properties

| | |
|-----------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 | UN/UNF nut threads |
| Sealing form 2 | 74° inner cone |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

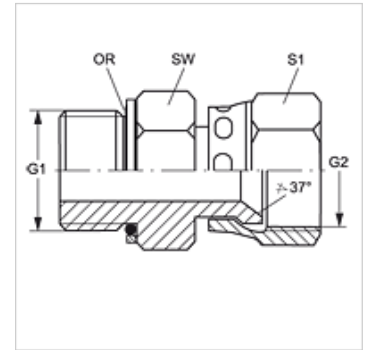

Item

| Identification | Operating pressure | G1 | G2 | AF (mm) | S1 | OR |
|------------------|--------------------|--------------|----------------|---------|----|--------------|
| GE HROK 02 AJ 04 | PN 315 | G 1/8" -28 | 7/16"-20 UNF | 16 | 14 | 7.97 x 1.88 |
| GE HROK 02 AJ 05 | PN 315 | G 1/8" -28 | 1/2"-20 UNF | 16 | 17 | 7.97 x 1.88 |
| GE HROK 04 AJ | PN 315 | G 1/4" -19 | 7/16"-20 UNF | 19 | 14 | 10.77 x 2.62 |
| GE HROK 04 AJ 05 | PN 315 | G 1/4" -19 | 1/2"-20 UNF | 19 | 17 | 10.77 x 2.62 |
| GE HROK 04 AJ 06 | PN 250 | G 1/4" -19 | 9/16"-18 UNF | 19 | 19 | 10.77 x 2.62 |
| GE HROK 04 AJ 08 | PN 250 | G 1/4" -19 | 3/4"-16 UNF | 19 | 22 | 10.77 x 2.62 |
| GE HROK 06 AJ 04 | PN 315 | G 3/8" -19 | 7/16"-20 UNF | 22 | 14 | 13.94 x 2.62 |
| GE HROK 06 AJ 05 | PN 315 | G 3/8" -19 | 1/2"-20 UNF | 22 | 17 | 13.94 x 2.62 |
| GE HROK 06 AJ | PN 250 | G 3/8" -19 | 9/16"-18 UNF | 22 | 19 | 13.94 x 2.62 |
| GE HROK 06 AJ 08 | PN 250 | G 3/8" -19 | 3/4"-16 UNF | 22 | 22 | 13.94 x 2.62 |
| GE HROK 06 AJ 10 | PN 200 | G 3/8" -19 | 7/8"-14 UNF | 22 | 27 | 13.94 x 2.62 |
| GE HROK 08 AJ 06 | PN 250 | G 1/2" -14 | 9/16"-18 UNF | 30 | 19 | 17.86 x 2.62 |
| GE HROK 08 AJ | PN 250 | G 1/2" -14 | 3/4"-16 UNF | 30 | 22 | 17.86 x 2.62 |
| GE HROK 08 AJ 10 | PN 200 | G 1/2" -14 | 7/8"-14 UNF | 30 | 27 | 17.86 x 2.62 |
| GE HROK 08 AJ 12 | PN 200 | G 1/2" -14 | 1.1/16" -12 UN | 30 | 32 | 17.86 x 2.62 |
| GE HROK 12 AJ 10 | PN 200 | G 3/4" -14 | 7/8"-14 UNF | 36 | 27 | 23.47 x 2.62 |
| GE HROK 12 AJ | PN 200 | G 3/4" -14 | 1.1/16" -12 UN | 36 | 32 | 23.47 x 2.62 |
| GE HROK 12 AJ 16 | PN 160 | G 3/4" -14 | 1.5/16" -12 UN | 36 | 41 | 23.47 x 2.62 |
| GE HROK 16 AJ 12 | PN 200 | G 1" -11 | 1.1/16" -12 UN | 46 | 32 | 29.74 x 3.53 |
| GE HROK 16 AJ | PN 160 | G 1" -11 | 1.5/16" -12 UN | 46 | 41 | 29.74 x 3.53 |
| GE HROK 16 AJ 20 | PN 125 | G 1" -11 | 1.5/8" -12 UN | 46 | 50 | 29.74 x 3.53 |
| GE HROK 20 AJ 16 | PN 160 | G 1.1/4" -11 | 1.5/16" -12 UN | 50 | 41 | 37.69 x 3.53 |
| GE HROK 20 AJ | PN 125 | G 1.1/4" -11 | 1.5/8" -12 UN | 50 | 50 | 37.69 x 3.53 |
| GE HROK 20 AJ 24 | PN 100 | G 1.1/4" -11 | 1.7/8" -12 UN | 50 | 60 | 37.69 x 3.53 |
| GE HROK 24 AJ | PN 100 | G 1.1/2" -11 | 1.7/8" -12 UN | 55 | 60 | 44.04 x 3.53 |

SW, S1, S2 = With across flats

Spare parts

| | |
|-------------------|---------------------------------|
| KAMMRING G | Spacer diaphragm ring, imperial |
|-------------------|---------------------------------|