


GE HROK AOB

Screw-in sockets

Properties

| | |
|-----------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 | BSP nut thread |
| Sealing form 2 | 60° outer cone with O-ring |
| Design | Screw-in sockets |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

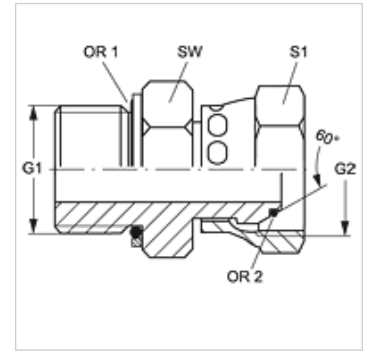

Item

| Identification | G1 + G2 | AF (mm) | S1 | OR1 | OR2 |
|-----------------------|--------------|------------|----|--------------|------------|
| GE HROK 04 AOB | G 1/4" -19 | 20 | 17 | 10.77 x 2.62 | 6.0 x 1.0 |
| GE HROK 06 AOB | G 3/8" -19 | 24 | 22 | 13.94 x 2.62 | 8.1 x 1.6 |
| GE HROK 08 AOB | G 1/2" -14 | 28 | 27 | 17.86 x 2.62 | 12.1 x 1.6 |
| GE HROK 12 AOB | G 3/4" -14 | 35 | 32 | 23.47 x 2.62 | 17.1 x 1.6 |
| GE HROK 16 AOB | G 1" -11 | 43 | 41 | 29.75 x 3.53 | 22.1 x 1.6 |
| GE HROK 20 AOB | G 1.1/4" -11 | 52 | 50 | 37.69 x 3.53 | 29.1 x 1.6 |
| GE HROK 24 AOB | G 1.1/2" -11 | 58 | 60 | 44.04 x 3.53 | 35.1 x 1.6 |

SW, S1, S2 = With across flats

Spare parts

| | |
|------------------|---------------------------------|
| KAMRING G | Spacer diaphragm ring, imperial |
|------------------|---------------------------------|