


GE O IN

Screw-on fitting

Properties

| | |
|-----------------------|--------------------------------|
| Connection 1 | UN/UNF external threads |
| Sealing form 1 | O-ring seal on screw-in socket |
| Connection 2 | NPT internal thread |
| Sealing form 2 | thread seal |
| Design | Screw-on fitting |
| Construction | straight |
| Material | Steel |
| Surface | electro galvanised |

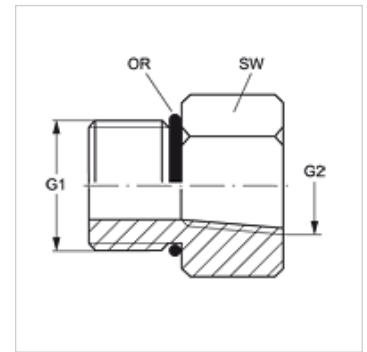

| Item | | | | |
|----------------|----------------|--------------|------------|--------------|
| Identification | G1 | G2 | AF (mm) | OR |
| GE O 06 IN 04 | 9/16"-18 UNF | 1/4" -18 NPT | 19 | 11.90 x 1.98 |
| GE O 08 IN 04 | 3/4"-16 UNF | 1/4" -18 NPT | 22 | 16.36 x 2.20 |
| GE O 08 IN 06 | 3/4"-16 UNF | 3/8" -18 NPT | 22 | 16.36 x 2.20 |
| GE O 08 IN | 3/4"-16 UNF | 1/2" -14 NPT | 29 | 16.36 x 2.20 |
| GE O 10 IN 04 | 7/8" -14 UNF | 1/4" -18 NPT | 25 | 19.18 x 2.46 |
| GE O 10 IN 06 | 7/8" -14 UNF | 3/8" -18 NPT | 25 | 19.18 x 2.46 |
| GE O 10 IN 08 | 7/8" -14 UNF | 1/2" -14 NPT | 29 | 19.18 x 2.46 |
| GE O 12 IN 08 | 1.1/16" -12 UN | 1/2" -14 NPT | 32 | 23.47 x 2.95 |
| GE O 12 IN | 1.1/16" -12 UN | 3/4" -14 NPT | 35 | 23.47 x 2.95 |

AF = Width across flats