


SA DKOR

Welded on sealing cone

Properties

| | |
|---------------------|---------------------------------------|
| Connection 1 | Welded on socket |
| Connection 2 | 60° sealing head with O-ring |
| Design | Welded on sealing cone |
| Construction | straight |
| Material | Steel |
| Surface | phosphate treated and oiled (Znphr5f) |

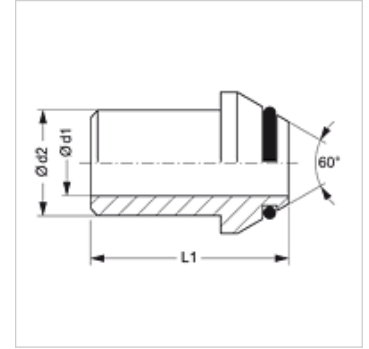

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Ø d1 (mm) | Ø d2 (mm) | L1 (mm) | L2 (mm) | OR |
|--------------------|--------------|--------------|------------|------------|------------|
| SA NW 06 DKOR 1.5 | 3,0 | 6 | 30 | 27 | 6.5 x 1.5 |
| SA NW 10 DKOR 1.75 | 6,5 | 10 | 31 | 28 | 8.1 x 1.6 |
| SA NW 13 DKOR 2 | 8,0 | 12 | 34 | 31 | 12.1 x 1.6 |
| SA NW 16 DKOR 2.5 | 11,0 | 16 | 34 | 32 | 13.1 x 1.6 |
| SA NW 20 DKOR 3 | 14,0 | 20 | 35 | 32 | 17.1 x 1.6 |
| SA NW 25 DKOR 3.5 | 18,0 | 25 | 37 | 33 | 22.1 x 1.6 |
| SA NW 32 DKOR 4 | 24,0 | 32 | 45 | 40 | 29.1 x 1.6 |
| SA NW 40 DKOR 4 | 30,0 | 38 | 47 | 42 | 35.1 x 1.6 |