


Properties

Connection 1	Welded on socket
Connection 2	60° sealing head with O-ring
Design	Welded on sealing cone
Construction	straight
Material	Steel
Surface	phosphate treated and oiled (Znphr5f)

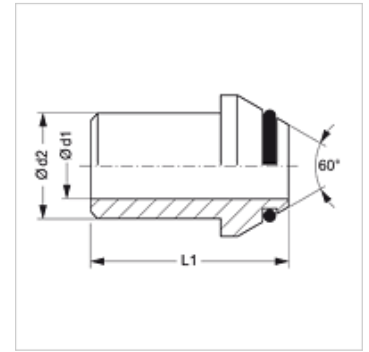

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Ø d1 (mm)	Ø d2 (mm)	L1 (mm)	L2 (mm)	OR
SA NW 06 DKOR 1.5	3,0	6	30	27	6.5 x 1.5
SA NW 10 DKOR 1.75	6,5	10	31	28	8.1 x 1.6
SA NW 13 DKOR 2	8,0	12	34	31	12.1 x 1.6
SA NW 16 DKOR 2.5	11,0	16	34	32	13.1 x 1.6
SA NW 20 DKOR 3	14,0	20	35	32	17.1 x 1.6
SA NW 25 DKOR 3.5	18,0	25	37	33	22.1 x 1.6
SA NW 32 DKOR 4	24,0	32	45	40	29.1 x 1.6
SA NW 40 DKOR 4	30,0	38	47	42	35.1 x 1.6