


# SA H VA

Welded on fitting

## Properties

<b>Connection 1</b>	Welded on socket
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	60° inner cone
<b>Design</b>	Welded on fitting
<b>Construction</b>	straight
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket (without union nut and cutting ring)
<b>Material</b>	Stainless steel

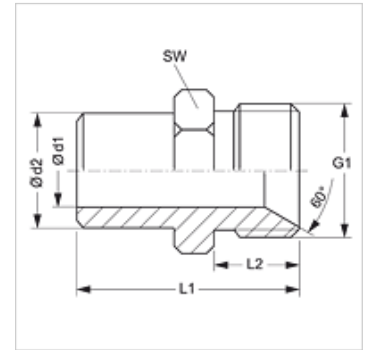

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	G1	Ø d1 (mm)	Ø d2 (mm)	L1 (mm)	L2 (mm)	AF (mm)
SA NW 04 H VA	M 12 x 1.5	3,5	6	24	10	12
SA NW 06 H VA	M 14 x 1.5	4,5	8	25	10	14
SA NW 08 H VA	M 16 x 1.5	6,0	10	25	10	17
SA NW 10 H VA	M 18 x 1.5	8,0	14	25	10	19
SA NW 13 H VA	M 22 x 1.5	10,5	17	27	12	22
SA NW 16 H VA	M 26 x 1.5	13,0	21	28	12	27
SA NW 20 H VA	M 30 x 1.5	15,5	25	28	12	30
SA NW 25 H VA	M 38 x 1.5	21,0	30	30	14	41
SA NW 32 H VA	M 45 x 1.5	28,0	38	31	14	46
SA NW 40 H VA	M 52 x 1.5	35,0	44	32	14	55
SA NW 50 H VA	M 65 x 2	45,0	57	36	17	65
SA NW 60 H VA	M 78 x 2	55,0	64	36	17	80