


## Properties

<b>Application</b>	Coolant and lubricant lines for metal chipping processes.
<b>Design</b>	Steel support helix with PVC inner hose Inlet side: Screw-in pin Outlet side: Steel discharge nozzle Surface nickel-plated
<b>Properties</b>	Completely tight can be bent into almost any position by hand tough resistant to oils, greases etc.

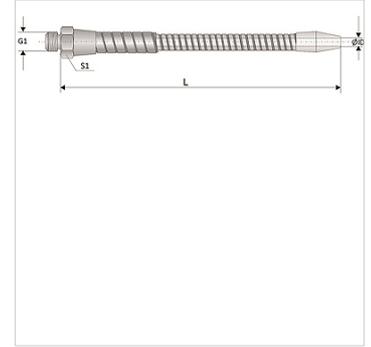

## Ordering information

Other sizes on request

Item	Identification	G1	ID (mm)	S1 (mm)	Nominal length (+/-5 mm)
NIAG 1/8-200		R 1/8"	8,0	15,0	200
NIAG 1/8-250		R 1/8"	8,0	15,0	250
NIAG 1/8-320		R 1/8"	8,0	15,0	320
NIAG 1/8-400		R 1/8"	8,0	15,0	400
NIAG 1/8-500		R 1/8"	8,0	15,0	500
NIAG 1/8-630		R 1/8"	8,0	15,0	630
NIAG 1/8-800		R 1/8"	8,0	15,0	800
NIAG 1/4-200		R 1/4"	10,0	19,0	200
NIAG 1/4-250		R 1/4"	10,0	19,0	250
NIAG 1/4-320		R 1/4"	10,0	19,0	320
NIAG 1/4-400		R 1/4"	10,0	19,0	400
NIAG 1/4-500		R 1/4"	10,0	19,0	500
NIAG 1/4-630		R 1/4"	10,0	19,0	630
NIAG 1/4-800		R 1/4"	10,0	19,0	800
NIAG 3/8-250		R 3/8"	10,0	24,0	250
NIAG 3/8-300		R 3/8"	10,0	24,0	300
NIAG 3/8-320		R 3/8"	10,0	24,0	320
NIAG 3/8-400		R 3/8"	10,0	24,0	400
NIAG 3/8-500		R 3/8"	10,0	24,0	500
NIAG 3/8-630		R 3/8"	10,0	24,0	630
NIAG 3/8-800		R 3/8"	10,0	24,0	800
NIAG 1/2-250		R 1/2"	12,0	27,0	250
NIAG 1/2-320		R 1/2"	12,0	27,0	320
NIAG 1/2-400		R 1/2"	12,0	27,0	400
NIAG 1/2-500		R 1/2"	12,0	27,0	500
NIAG 1/2-630		R 1/2"	12,0	27,0	630
NIAG 1/2-800		R 1/2"	12,0	27,0	800