
HF 200 (2SN)
Hot water hose

Properties

Application	High pressure cleaning equipment
Standard	EN 853 2 SN
Inner layer	water, oil and heat resistant synthetic rubber
Insert	two high tensile steel wire braided inserts
Outer layer	environmentally safe synthetic rubber
Colour	blue
Temp. min.	-10 °C
Temp. max.	150 °C
Elongation	+ 2 % to - 4 %
Media	Water Mineral oil (up to + 100°C) Water-oil emulsions

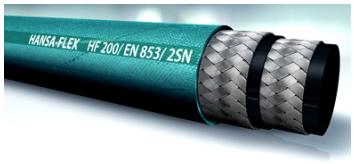

Note

The change in length of the hose is determined at max. working pressure during testing to EN ISO 1402.

Item

Identification	DN*	Inches	Size	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
HF 206	6	1/4"	4	6,4	15,7	400,0	1600	100
HF 208	8	5/16"	5	7,9	17,3	400,0	1470	115
HF 210	10	3/8"	6	9,5	19,7	400,0	1320	130
HF 213	12	1/2"	8	12,7	23,0	400,0	1100	180

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.