
KOMP
Compressor hose

HANSA-FLEX

Properties

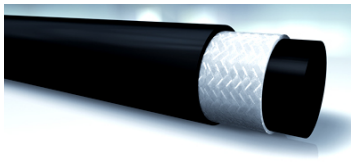

Application	Low pressure range for compressors
Special features	resistant to aging and weatherproof
Inner layer	SBR
Insert	one high tensile synthetic thread braided insert
Outer layer	SBR smooth
Colour	black
Temp. min.	-25 °C
Temp. max.	70 °C
Media	Water Compressed air containing oil mist

Item

Identification	Internal Ø (mm)	External Ø (mm)	BD* for air (bar)	Burst pressure (bar)	Min. bending radius (mm)	Roll length (m)
KOMP 6-3.5	6	13	20	60	30	40
KOMP 9-3.5	8	15	20	60	35	40
KOMP 10-5	10	18	20	60	40	40
KOMP 13-5	13	22	20	60	60	40
KOMP 15-6	16	25	20	60	75	40
KOMP 19-6	19	29	20	60	90	40
KOMP 25-7	25	37	20	60	120	40

BD = Working pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.