
SI 200
Fuel hose with braiding

HANSA-FLEX

Properties

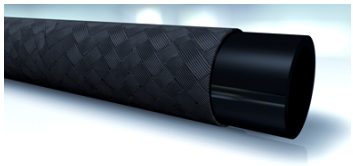

Application	Low pressure hose for fuel lines
Standard	DIN 73379
Inner layer	oil resistant synthetic rubber
Insert	one braided textile insert
Outer layer	none
Colour	black
Temp. min.	-35 °C
Temp. max.	80 °C
Media	Petrol fuels Diesel Crude oil Lubricating oil

Item

Identification	DN*	Inches	Size	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Test pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
SI 202	2	3/32"	1	3,2	7,0	20,0	30	60	20
SI 203	3	1/8"	2	4,5	9,5	20,0	30	60	25
SI 204	4	3/16"	3	5,5	10,5	20,0	30	60	25
SI 206	6	1/4"	4	7,5	12,5	15,0	25	50	30
SI 208	8	5/16"	5	9,5	15,0	15,0	25	50	40
SI 210	10	3/8"	6	11,5	17,0	15,0	25	50	45
SI 213	12	1/2"	8	15,0	22,0	12,0	20	40	50
SI 216	16	5/8"	10	18,0	26,0	12,0	20	38	70

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.