
SI 200 RME
Fuel hose

Properties

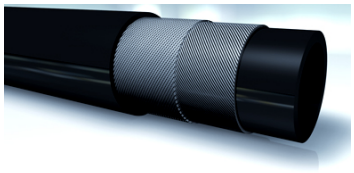

Application	Low pressure hose for fuel lines
Special features	antistatic inner and outer rubber
Inner layer	NBR
Insert	spiral synthetic textile threads
Outer layer	BNBR/EPDM, smooth
Colour	black
Temp. min.	-30 °C
Temp. max.	100 °C
Media	Bio-diesel (B20) Diesel Petrol fuels Max. Temp. for fuel max. +70 °C

Item

Identification	DN*	Inches	Size	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
SI 206 RME	6	1/4"	4	6,0	13	10,0	30	55
SI 208 RME	8	5/16"	5	7,5	14	10,0	30	65
SI 210 RME	10	3/8"	6	10,0	16	10,0	30	75

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.