
TE 200 (2TE)

Low pressure hose with textile insert

Properties

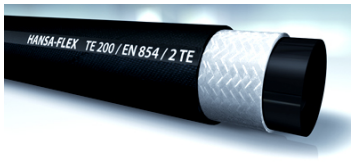

Application	Low pressure hose for general applications.
Standard	EN 854 2 TE
Inner layer	oil resistant synthetic rubber
Insert	one or two textile braided inserts
Outer layer	oil resistant and weatherproof synthetic rubber
Colour	black
Temp. min.	-40 °C
Temp. max.	100 °C
Elongation	+ 2 % to - 4 %
Media	Glycol Mineral oil Water (0°C to + 70°C) Water-oil emulsions

Note

The change in length of the hose is determined at max. working pressure during testing to EN ISO 1402.

Item

Identification	DN*	Size	Inches	Internal Ø min. (mm)	Internal Ø max. (mm)	External Ø min. (mm)	External Ø (mm)	External Ø max. (mm)	Operating pressure (bar)	Test pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
TE 225	25	16	1"	24,6	26,2	32,9	-	35,9	40,0	80	160	130
TE 232	31	20	1.1/4"	30,8	32,8	-	42,3	-	35,0	70	140	140

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.