
TR WT
PA 12 plastic pipe, soft

HANSA-FLEX

Properties

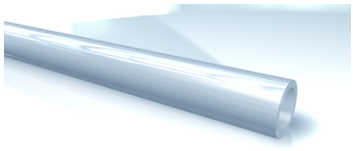

Application	Control lines in hydraulics and pneumatics automotive technology laboratories and food industry
Special features	resistant to temperature and weatherproof low weight
Inner layer	Polyamide
Insert	none
Outer layer	Polyamide
Colour	Transparent
Temp. min.	-60 °C
Temp. max.	100 °C
Temp. range	Temperature peaks up to 120°C
Media	Mineral oil Grease Propellants resistant to aqueous acids, alkalis and salts

Note

From 20 °C the pressure reduction factor is to be taken into account.
(Max. operating pressure = operating pressure x factor).
Temp.: 20°C / 30° C / 40°C / 50 °C / 60°C / 70°C / 80°C / 90°C / 100°C / 110°C / 120°C
Factor: 1.00 / 0.83 / 0.72 / 0.64 / 0.57 / 0.52 / 0.47 / 0.44 / 0.36 / 0.32 / 0.28

Item

Identification	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	BD* at 20°C (bar)	Min. bending radius (mm)
TR 04-0.5 WT	3,0	4,0	0,500	19,0	20
TR 04-0.65 WT	2,7	4,0	0,650	26,0	20
TR 04-1 WT	2,0	4,0	1,000	44,0	20
TR 05-0.85 WT	3,3	5,0	0,850	28,0	25
TR 05-1 WT	3,0	5,0	1,000	34,0	25
TR 06-1 WT	4,0	6,0	1,000	27,0	30
TR 06-1.5 WT	3,0	6,0	1,500	45,0	30
TR 08-1 WT	6,0	8,0	1,000	19,0	40
TR 08-1.5 WT	5,0	8,0	1,500	31,0	40
TR 08-2 WT	4,0	8,0	2,000	45,0	40
TR 10-1 WT	8,0	10,0	1,000	15,0	60
TR 10-1.25 WT	7,5	10,0	1,250	19,0	60
TR 10-2 WT	6,0	10,0	2,000	34,0	50
TR 12-1 WT	10,0	12,0	1,000	12,0	55
TR 12-1.5 WT	9,0	12,0	1,500	19,0	60
TR 12-2 WT	8,0	12,0	2,000	27,0	60
TR 12.5-1.25 WT	10,0	12,5	1,250	15,0	75
TR 14-1.5 WT	11,0	14,0	1,500	16,0	80
TR 15-1.5 WT	12,0	15,0	1,500	15,0	90
TR 18-2 WT	14,0	18,0	2,000	16,0	100
TR 20-2 WT	16,0	20,0	2,000	14,0	120
TR 22-2 WT	18,0	22,0	2,000	13,0	150
TR 25-2.5 WT	20,0	25,0	2,500	14,0	150
TR 28-2.5 WT	23,0	28,0	2,500	13,0	150
TR 30-2.5 WT	25,0	30,0	2,500	8,0	260

BD = Working pressure

Product versions

TR WB	PA 12 plastic pipe, soft, blue
TR WGE	PA 12 plastic pipe, soft, yellow
TR WR	PA 12 plastic pipe, soft, red
TR WS	PA 12 plastic pipe, soft, black

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.